



İçten Soğutmalı İç Çap Kater  
Boring Bars With Coolant

95° SCLCR IK

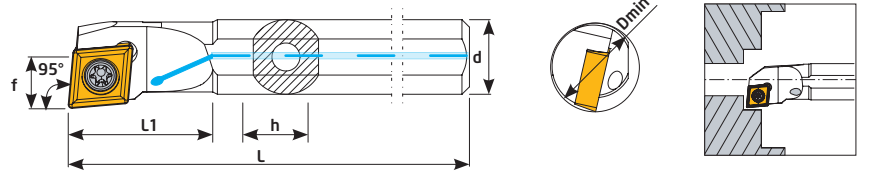

Sipariş Kodu Order Code Best.-Nr.	Stok/Stock/Lager	Ürün Kodu Product Code	Ölçüler (mm) Dimensions(mm) Abmessungen (mm)							Kullanılan Uç Insert WSP	Sıkma Civatası Clamp Screw Torx-Schraube	Anahtar Torx Key Torx-Schlüssel
			Dmin	d	L	L1	f	h	kg			
KA102	●	A08H SCLCR 06	10	8	100	16	5,5	7	0,050	CC-- 0602	TC060 M2,5x5,5	T8
KA104	●	A10J SCLCR 06	12	10	110	20	6	9	0,074			
KA106	●	A12K SCLCR 06	16	12	125	25	9	11	0,113			
KA108	●	A14-16Q SCLCR 09	18	16	180	45	9,5	15	0,267	CC-- 09T3	TC067 M3,5x8,5	T15
KA110	●	A16Q SCLCR 09	20	16	180	30	11	15	0,260			
KA111	●	A16M SCLCR 09	20	16	150	30	11	15	0,227			
KA114	●	A20Q SCLCR 09	25	20	180	40	13	18	0,422			
KA116	●	A25R SCLCR 09	32	25	200	40	17	23	0,734			

95° SCLCL IK

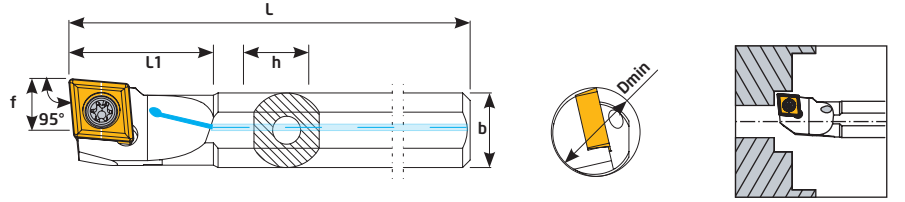

Sipariş Kodu Order Code Best.-Nr.	Stok/Stock/Lager	Ürün Kodu Product Code Produkt-Code	Ölçüler (mm) Dimensions(mm) Abmessungen (mm)							Kullanılan Uç Insert WSP	Sıkma Civatası Clamp Screw Torx-Schraube	Anahtar Torx Key Torx-Schlüssel
			Dmin	d	L	L1	f	h	kg			
KA232	●	A08H SCLCL 06	10	8	100	16	5,5	7	0,050	CC-- 0602	TC060 M2,5x5,5	T8
KA234	●	A10J SCLCL 06	12	10	110	20	6	9	0,074			
KA236	●	A12K SCLCL 06	16	12	125	25	9	11	0,113			
KA239	●	A16M SCLCL 09	20	16	150	30	11	15	0,227	CC-- 09T3	TC067 M3,5x8,5	T15
KA240	●	A16Q SCLCL 09	20	16	180	30	11	15	0,260			
KA244	●	A20Q SCLCL 09	25	20	180	40	13	18	0,422			
KA246	●	A25R SCLCL 09	32	25	200	40	17	23	0,734			