




A110

DORMER

HSS Long Series Drill, Steam Tempered Finish

For drilling deeper holes. Conventional 118° point provides strength and means an easy point to regrind, making it very cost-effective. Suitable for drilling many materials. Steam tempered finish retains cutting fluid and prevents chip to tool welding. For hand-held and machine drilling.

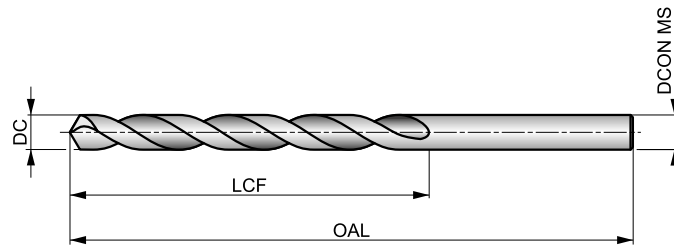

HSS	DIN 340	6×D
118°	ST	
λ 20-35°	R	DC h8

Workpiece material group suitability, starting values for cutting speed (m/min) and feed Alpha Code. Tables with feed per revolution can be found starting from page 175.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
27 G	30 G	31 G	23 G	20 E	18 D	13 E	11 E	9 D	8 E	7 D	5 B	14 D	12 D
M2.1	M2.2	M3.1	M3.2	M3.3	M4.1	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3	K3.1	K3.2
12 D	10 D	7 F	6 F	5 F	4 B	28 H	21 E	16 E	18 D	15 D	12 D	16 D	12 D
K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N1.1	N1.2	N1.3	N2.1	N2.2
10 D	15 D	11 D	8 D	7 D	6 D	17 D	13 D	10 D	32 I	24 I	16 H	42 G	37 G
N2.3	N3.1	N3.2	N3.3	N4.1	N4.2	N4.3	S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2
27 G	54 G	32 H	16 E	35 I	26 G	12 E	17 E	9 C	4 A	5 D	4 A	4 D	3 A
S4.1	S4.2												
3 D	2 A												

DC ≤ 1mm; 1/16" Bright.

Product	DC	DC	DC	LCF	OAL	DCON MS
	[inch]	[mm]	[inch]	[mm]	[mm]	[mm]
A110.5	—	0.50	0.0197	12.0	32.0	0.50
A110.6	—	0.60	0.0236	15.0	35.0	0.60
A110.7	—	0.70	0.0276	21.0	42.0	0.70
A1101/32	1/32	0.79	0.0313	25.0	46.0	0.79
A110.8	—	0.80	0.0315	25.0	46.0	0.80
A110.9	—	0.90	0.0354	29.0	51.0	0.90
A1101.0	—	1.00	0.0394	33.0	56.0	1.00
A1101.1	—	1.10	0.0433	37.0	60.0	1.10
A1101.2	—	1.20	0.0472	41.0	65.0	1.20
A1101.3	—	1.30	0.0512	41.0	65.0	1.30
A1101.4	—	1.40	0.0551	45.0	70.0	1.40
A1101.5	—	1.50	0.0591	45.0	70.0	1.50
A1101/16	1/16	1.59	0.0625	50.0	76.0	1.59
A1101.6	—	1.60	0.0630	50.0	76.0	1.60
A1101.7	—	1.70	0.0669	50.0	76.0	1.70
A1101.75	—	1.75	0.0689	53.0	80.0	1.75
A1101.8	—	1.80	0.0709	53.0	80.0	1.80
A1101.9	—	1.90	0.0748	53.0	80.0	1.90
A1105/64	5/64	1.98	0.0781	56.0	85.0	1.98
A1102.0	—	2.00	0.0787	56.0	85.0	2.00
A1102.05	—	2.05	0.0807	56.0	85.0	2.05
A1102.1	—	2.10	0.0827	56.0	85.0	2.10
A1102.2	—	2.20	0.0866	59.0	90.0	2.20
A1102.25	—	2.25	0.0886	59.0	90.0	2.25

Product	DC	DC	DC	LCF	OAL	DCON MS
	[inch]	[mm]	[inch]	[mm]	[mm]	[mm]
A1102.3	—	2.30	0.0906	59.0	90.0	2.30
A1103/32	3/32	2.38	0.0938	62.0	95.0	2.38
A1102.4	—	2.40	0.0945	62.0	95.0	2.40
A1102.5	—	2.50	0.0984	62.0	95.0	2.50
A1102.6	—	2.60	0.1024	62.0	95.0	2.60
A1102.7	—	2.70	0.1063	66.0	100.0	2.70
A1107/64	7/64	2.78	0.1094	66.0	100.0	2.78
A1102.8	—	2.80	0.1102	66.0	100.0	2.80
A1102.9	—	2.90	0.1142	66.0	100.0	2.90
A1103.0	—	3.00	0.1181	66.0	100.0	3.00
A1103.1	—	3.10	0.1220	69.0	106.0	3.10
A1101/8	1/8	3.18	0.1250	69.0	106.0	3.18
A1103.2	—	3.20	0.1260	69.0	106.0	3.20
A1103.25	—	3.25	0.1280	69.0	106.0	3.25
A1103.3	—	3.30	0.1299	69.0	106.0	3.30
A1103.4	—	3.40	0.1339	73.0	112.0	3.40
A1103.5	—	3.50	0.1378	73.0	112.0	3.50
A1109/64	9/64	3.57	0.1406	73.0	112.0	3.57
A1103.6	—	3.60	0.1417	73.0	112.0	3.60
A1103.7	—	3.70	0.1457	73.0	112.0	3.70
A1103.75	—	3.75	0.1476	73.0	112.0	3.75
A1103.8	—	3.80	0.1496	78.0	119.0	3.80
A1103.9	—	3.90	0.1535	78.0	119.0	3.90
A1105/32	5/32	3.97	0.1563	78.0	119.0	3.97




Product	DC	DC	DC	LCF	OAL	DCON MS
	[inch]	[mm]	[inch]	[mm]	[mm]	[mm]
A1104.0	—	4.00	0.1575	78.0	119.0	4.00
A1104.1	—	4.10	0.1614	78.0	119.0	4.10
A1104.2	—	4.20	0.1654	78.0	119.0	4.20
A1104.25	—	4.25	0.1673	78.0	119.0	4.25
A1104.3	—	4.30	0.1693	82.0	126.0	4.30
A11011/64	11/64	4.37	0.1719	82.0	126.0	4.37
A1104.4	—	4.40	0.1732	82.0	126.0	4.40
A1104.5	—	4.50	0.1772	82.0	126.0	4.50
A1104.6	—	4.60	0.1811	82.0	126.0	4.60
A1104.7	—	4.70	0.1850	82.0	126.0	4.70
A1104.75	—	4.75	0.1870	82.0	126.0	4.75
A1103/16	3/16	4.76	0.1875	87.0	132.0	4.76
A1104.8	—	4.80	0.1890	87.0	132.0	4.80
A1104.9	—	4.90	0.1929	87.0	132.0	4.90
A1105.0	—	5.00	0.1969	87.0	132.0	5.00
A1105.1	—	5.10	0.2008	87.0	132.0	5.10
A11013/64	13/64	5.16	0.2031	87.0	132.0	5.16
A1105.2	—	5.20	0.2047	87.0	132.0	5.20
A1105.25	—	5.25	0.2067	87.0	132.0	5.25
A1105.3	—	5.30	0.2087	87.0	132.0	5.30
A1105.4	—	5.40	0.2126	91.0	139.0	5.40
A1105.5	—	5.50	0.2165	91.0	139.0	5.50
A1107/32	7/32	5.56	0.2188	91.0	139.0	5.56
A1105.6	—	5.60	0.2205	91.0	139.0	5.60
A1105.7	—	5.70	0.2244	91.0	139.0	5.70
A1105.75	—	5.75	0.2264	91.0	139.0	5.75
A1105.8	—	5.80	0.2283	91.0	139.0	5.80
A1105.9	—	5.90	0.2323	91.0	139.0	5.90
A11015/64	15/64	5.95	0.2344	91.0	139.0	5.95
A1106.0	—	6.00	0.2362	91.0	139.0	6.00
A1106.1	—	6.10	0.2402	97.0	148.0	6.10
A1106.2	—	6.20	0.2441	97.0	148.0	6.20
A1106.25	—	6.25	0.2461	97.0	148.0	6.25
A1106.3	—	6.30	0.2480	97.0	148.0	6.30
A1101/4	1/4	6.35	0.2500	97.0	148.0	6.35
A1106.4	—	6.40	0.2520	97.0	148.0	6.40
A1106.5	—	6.50	0.2559	97.0	148.0	6.50
A1106.6	—	6.60	0.2598	97.0	148.0	6.60
A1106.7	—	6.70	0.2638	97.0	148.0	6.70
A11017/64	17/64	6.75	0.2656	102.0	156.0	6.75
A1106.75	—	6.75	0.2657	102.0	156.0	6.75
A1106.8	—	6.80	0.2677	102.0	156.0	6.80
A1106.9	—	6.90	0.2717	102.0	156.0	6.90
A1107.0	—	7.00	0.2756	102.0	156.0	7.00
A1107.1	—	7.10	0.2795	102.0	156.0	7.10
A1109/32	9/32	7.14	0.2813	102.0	156.0	7.14
A1107.2	—	7.20	0.2835	102.0	156.0	7.20
A1107.25	—	7.25	0.2854	102.0	156.0	7.25
A1107.3	—	7.30	0.2874	102.0	156.0	7.30
A1107.4	—	7.40	0.2913	102.0	156.0	7.40
A1107.5	—	7.50	0.2953	102.0	156.0	7.50
A1107.6	—	7.60	0.2992	109.0	165.0	7.60
A1107.7	—	7.70	0.3031	109.0	165.0	7.70
A1107.75	—	7.75	0.3051	109.0	165.0	7.75
A1107.8	—	7.80	0.3071	109.0	165.0	7.80
A1107.9	—	7.90	0.3110	109.0	165.0	7.90
A1105/16	5/16	7.94	0.3125	109.0	165.0	7.94
A1108.0	—	8.00	0.3150	109.0	165.0	8.00
A1108.1	—	8.10	0.3189	109.0	165.0	8.10
A1108.2	—	8.20	0.3228	109.0	165.0	8.20
A1108.25	—	8.25	0.3248	109.0	165.0	8.25
A1108.3	—	8.30	0.3268	109.0	165.0	8.30
A1108.4	—	8.40	0.3307	109.0	165.0	8.40
A1108.5	—	8.50	0.3346	109.0	165.0	8.50
A1108.6	—	8.60	0.3386	115.0	175.0	8.60

Product	DC	DC	DC	LCF	OAL	DCON MS
	[inch]	[mm]	[inch]	[mm]	[mm]	[mm]
A1108.7	—	8.70	0.3425	115.0	175.0	8.70
A11011/32	11/32	8.73	0.3438	115.0	175.0	8.73
A1108.75	—	8.75	0.3445	115.0	175.0	8.75
A1108.8	—	8.80	0.3465	115.0	175.0	8.80
A1108.9	—	8.90	0.3504	115.0	175.0	8.90
A1109.0	—	9.00	0.3543	115.0	175.0	9.00
A1109.1	—	9.10	0.3583	115.0	175.0	9.10
A1109.2	—	9.20	0.3622	115.0	175.0	9.20
A1109.25	—	9.25	0.3642	115.0	175.0	9.25
A1109.3	—	9.30	0.3661	115.0	175.0	9.30
A1109.4	—	9.40	0.3701	115.0	175.0	9.40
A1109.5	—	9.50	0.3740	115.0	175.0	9.50
A1103/8	3/8	9.52	0.3750	121.0	184.0	9.52
A1109.6	—	9.60	0.3780	121.0	184.0	9.60
A1109.7	—	9.70	0.3819	121.0	184.0	9.70
A1109.75	—	9.75	0.3839	121.0	184.0	9.75
A1109.8	—	9.80	0.3858	121.0	184.0	9.80
A1109.9	—	9.90	0.3898	121.0	184.0	9.90
A11010.0	—	10.00	0.3937	121.0	184.0	10.00
A11010.1	—	10.10	0.3976	121.0	184.0	10.10
A11010.2	—	10.20	0.4016	121.0	184.0	10.20
A11010.25	—	10.25	0.4035	121.0	184.0	10.25
A11010.3	—	10.30	0.4055	121.0	184.0	10.30
A11013/32	13/32	10.32	0.4063	121.0	184.0	10.32
A11010.5	—	10.50	0.4134	121.0	184.0	10.50
A11010.75	—	10.75	0.4232	128.0	195.0	10.75
A11010.8	—	10.80	0.4252	128.0	195.0	10.80
A11011.0	—	11.00	0.4331	128.0	195.0	11.00
A1107/16	7/16	11.11	0.4375	128.0	195.0	11.11
A11011.25	—	11.25	0.4429	128.0	195.0	11.25
A11011.4	—	11.40	0.4488	128.0	195.0	11.40
A11011.5	—	11.50	0.4528	128.0	195.0	11.50
A11011.75	—	11.75	0.4626	128.0	195.0	11.75
A11012.0	—	12.00	0.4724	134.0	205.0	12.00
A11012.1	—	12.10	0.4764	134.0	205.0	12.10
A11012.25	—	12.25	0.4823	134.0	205.0	12.25
A11012.5	—	12.50	0.4921	134.0	205.0	12.50
A1101/2	1/2	12.70	0.5000	134.0	205.0	12.70
A11013.0	—	13.00	0.5118	134.0	205.0	13.00
A11017/32	17/32	13.49	0.5313	140.0	214.0	13.49
A11013.5	—	13.50	0.5315	140.0	214.0	13.50
A11014.0	—	14.00	0.5512	140.0	214.0	14.00
A1109/16	9/16	14.29	0.5625	144.0	220.0	14.29
A11014.5	—	14.50	0.5709	144.0	220.0	14.50
A11015.0	—	15.00	0.5906	144.0	220.0	15.00
A11015.5	—	15.50	0.6102	149.0	227.0	15.50
A1105/8	5/8	15.88	0.6250	149.0	227.0	15.88
A11016.0	—	16.00	0.6299	149.0	227.0	16.00
A11016.5	—	16.50	0.6496	154.0	235.0	16.50
A11017.0	—	17.00	0.6693	154.0	235.0	17.00
A11011/16	11/16	17.46	0.6875	158.0	241.0	17.46
A11017.5	—	17.50	0.6890	158.0	241.0	17.50
A11018.0	—	18.00	0.7087	158.0	241.0	18.00
A11018.5	—	18.50	0.7283	162.0	247.0	18.50
A11019.0	—	19.00	0.7480	162.0	247.0	19.00
A1103/4	3/4	19.05	0.7500	166.0	254.0	19.05
A11019.5	—	19.50	0.7677	166.0	254.0	19.50
A11020.0	—	20.00	0.7874	166.0	254.0	20.00
A11021.0	—	21.00	0.8268	171.0	261.0	21.00
A11022.0	—	22.00	0.8661	176.0	268.0	22.00
A1107/8	7/8	22.22	0.8750	176.0	268.0	22.22
A11015/16	15/16	23.81	0.9375	185.0	282.0	23.81
A1101	1"	25.40	1.0000	190.0	290.0	25.40



DRILLING FEED RATE CHART

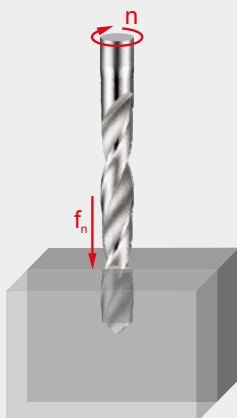

Feed per revolution (f_n in mm/rev)
Depending on the working conditions
it might be necessary to adjust these
values $\pm 25\%$.

How to use this table to find the feed per revolution (f_n):

1. Find your Alpha Code on the product page (example: 46J, "J" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per revolution (f_n).

		ø DC [mm]																		
		0.15	0.50	1.00	2.00	3.00	4.00	5.00	6.00	8.00	10.00	12.00	15.00	16.00	20.00	25.00	30.00	40.00	50.00	100.00
Feed rates	A	0.003	0.006	0.012	0.023	0.029	0.032	0.036	0.042	0.054	0.062	0.069	0.082	0.086	0.110	0.125	0.135	0.155	0.175	0.263
	B	0.004	0.007	0.014	0.028	0.037	0.041	0.046	0.053	0.067	0.080	0.090	0.103	0.108	0.135	0.153	0.165	0.188	0.208	0.312
	C	0.004	0.008	0.015	0.032	0.044	0.050	0.056	0.064	0.080	0.098	0.110	0.125	0.130	0.160	0.180	0.195	0.220	0.240	0.360
	D	0.004	0.008	0.016	0.038	0.053	0.060	0.068	0.078	0.098	0.119	0.130	0.149	0.155	0.188	0.210	0.228	0.253	0.275	0.413
	E	0.004	0.009	0.017	0.043	0.062	0.071	0.080	0.092	0.115	0.140	0.150	0.173	0.180	0.215	0.240	0.260	0.285	0.310	0.465
	F	0.005	0.009	0.018	0.050	0.073	0.084	0.095	0.109	0.138	0.165	0.178	0.202	0.210	0.248	0.275	0.295	0.320	0.343	0.515
	G	0.005	0.010	0.019	0.056	0.084	0.096	0.109	0.126	0.160	0.190	0.205	0.231	0.240	0.280	0.310	0.330	0.355	0.375	0.563
	H	0.005	0.010	0.020	0.066	0.102	0.116	0.130	0.150	0.190	0.228	0.243	0.271	0.280	0.320	0.355	0.375	0.398	0.418	0.627
	I	0.005	0.011	0.021	0.076	0.119	0.134	0.150	0.173	0.220	0.265	0.280	0.310	0.320	0.360	0.400	0.420	0.440	0.460	0.690
	J	0.006	0.012	0.024	0.084	0.135	0.152	0.170	0.197	0.250	0.298	0.315	0.349	0.360	0.405	0.445	0.465	0.485	0.503	0.755
	K	0.007	0.013	0.026	0.092	0.150	0.170	0.190	0.220	0.280	0.330	0.350	0.388	0.400	0.450	0.490	0.510	0.530	0.545	0.818
	L	0.007	0.014	0.028	0.101	0.165	0.186	0.208	0.240	0.305	0.360	0.385	0.419	0.430	0.485	0.525	0.545	0.568	0.588	0.882
	M	0.008	0.015	0.030	0.110	0.180	0.202	0.225	0.260	0.330	0.390	0.420	0.450	0.460	0.520	0.560	0.580	0.605	0.630	0.945
	N	0.008	0.016	0.032	0.119	0.195	0.218	0.242	0.280	0.355	0.420	0.455	0.481	0.490	0.555	0.595	0.615	0.642	0.672	1.008
	S	0.002	0.004	0.008	0.014	0.020	0.025	0.030	0.037	0.050	0.080	0.100	0.123	0.130	0.150	0.170	0.190	0.220	0.240	–
	T	0.004	0.008	0.015	0.028	0.040	0.050	0.060	0.070	0.090	0.110	0.130	0.160	0.170	0.190	0.210	0.230	0.260	0.275	–
	U	0.007	0.013	0.026	0.048	0.070	0.080	0.090	0.107	0.140	0.170	0.200	0.223	0.230	0.240	0.270	0.300	0.360	0.375	–
	V	0.010	0.019	0.038	0.069	0.100	0.115	0.130	0.153	0.200	0.250	0.280	0.310	0.320	0.340	0.400	0.440	0.510	0.530	–
	W	0.012	0.025	0.049	0.089	0.130	0.150	0.170	0.200	0.260	0.330	0.380	0.418	0.430	0.450	0.470	0.490	0.520	0.540	–
	X	0.014	0.028	0.056	0.103	0.150	0.180	0.210	0.250	0.330	0.420	0.480	0.533	0.550	0.580	–	–	–	–	–
	Y	0.017	0.034	0.068	0.124	0.180	0.220	0.260	0.317	0.430	0.550	0.700	0.700	0.700	0.740	–	–	–	–	–
	Z	0.024	0.047	0.094	0.172	0.250	0.325	0.400	0.533	0.800	1.000	1.100	1.175	1.200	1.200	–	–	–	–	–



WMG (WORK MATERIAL GROUP)

ISO group		WMG (Work Material Group)			Hardness (HB or HRC)	Ultimate Tensile Strength (MPa)	
P	P1	P1.1	Free machining steel (carbon steels with increased machinability)	Sulfurized	< 240 HB	≤ 830	
		P1.2		Sulfurized and phosphorized	< 180 HB	≤ 620	
		P1.3		Sulfurized/phosphorized and leaded	< 180 HB	≤ 620	
	P2	P2.1	Plain carbon steel (steels comprised of mainly iron and carbon)	Containing <0.25 % C	< 180 HB	≤ 620	
		P2.2		Containing <0.55 % C	< 240 HB	≤ 830	
		P2.3		Containing >0.55 % C	< 300 HB	≤ 1030	
	P3	P3.1	Alloy steel (carbon steels with an alloying content ≤ 10%)	Annealed	< 180 HB	≤ 620	
		P3.2		Hardened and tempered	180 – 260 HB	> 620 ≤ 900	
		P3.3			260 – 360 HB	> 900 ≤ 1240	
	P4	P4.1	Tool steel (special alloy steel for tools, dies and molds)	Annealed	< 26 HRC	≤ 900	
P4.2		Hardened and tempered		26 – 39 HRC	> 900 ≤ 1240		
P4.3				39 – 45 HRC	> 1240 ≤ 1450		
M	M1	M1.1	Ferritic stainless steel (straight chromium non-hardenable alloys)		< 160 HB	≤ 520	
		M1.2		160 – 220 HB	> 520 ≤ 700		
	M2	M2.1	Martensitic stainless steel (straight chromium hardenable alloys)	Annealed	< 200 HB	≤ 670	
		M2.2		Quenched and tempered	200 – 280 HB	> 670 ≤ 950	
		M2.3		Precipitation-hardened	280 – 380 HB	> 950 ≤ 1300	
	M3	M3.1	Austenitic stainless steel (chromium-nickel and chromium-nickel-manganese alloys)		< 200 HB	≤ 750	
		M3.2		200 – 260 HB	> 750 ≤ 870		
		M3.3		260 – 300 HB	> 870 ≤ 1040		
	M4	M4.1	Austenitic-ferritic (DUPLEX) or super-austenitic stainless steel		< 300 HB	≤ 990	
		M4.2		Precipitation hardening austenitic stainless steel	300 – 380 HB	≤ 1320	
K	K1	K1.1	Gray iron or Automotive Gray iron (GG) (iron-carbon castings with a lamellar graphite microstructure)	Ferritic or ferritic-pearlitic	< 180 HB	≤ 190	
		K1.2		Ferritic-pearlitic or pearlitic	180 – 240 HB	> 190 ≤ 310	
		K1.3		Pearlitic	240 – 280 HB	> 310 ≤ 390	
	K2	K2.1	Malleable iron (GTS/GTW) (iron-carbon castings with a graphite-free microstructure)	Ferritic	< 160 HB	≤ 400	
		K2.2		Ferritic or pearlitic	160 – 200 HB	> 400 ≤ 550	
		K2.3		Pearlitic	200 – 240 HB	> 550 ≤ 660	
	K3	K3.1	Ductile iron (GGG) (iron-carbon castings with a nodular graphite microstructure)	Ferritic	< 180 HB	≤ 560	
		K3.2		Ferritic or pearlitic	180 – 220 HB	> 560 ≤ 680	
		K3.3		Pearlitic	220 – 260 HB	> 680 ≤ 800	
	K4	K4.1	Austenitic gray iron (ASTM A436) (iron-carbon alloy castings with an austenitic lamellar graphite microstructure)		< 180 HB	≤ 190	
K4.2				< 240 HB	≤ 740		
K4.3		Austempered ductile iron (ASTM A897) (iron-carbon alloy castings with an ausferrite microstructure)		< 280 HB	> 840 ≤ 980		
K4.4				280 – 320 HB	> 980 ≤ 1130		
K4.5				320 – 360 HB	> 1130 ≤ 1280		
K5	K5.1	Compacted graphite iron CGI (ASTM A842) (iron-carbon castings with a vermicular graphite structure)	Ferritic	< 180 HB	≤ 400		
	K5.2		Ferritic-pearlitic	180 – 220 HB	> 400 ≤ 450		
	K5.3		Pearlitic	220 – 260 HB	> 450 ≤ 500		
N	N1	N1.1	Commercially pure wrought aluminium		< 60 HB	≤ 240	
		N1.2		Wrought aluminium alloys	Half hard tempered	60 – 100 HB	> 240 ≤ 400
		N1.3			Full hard tempered	100 – 150 HB	> 400 ≤ 590
	N2	N2.1	Cast aluminium alloys		< 75 HB	≤ 240	
		N2.2		75 – 90 HB	> 240 ≤ 270		
		N2.3		90 – 140 HB	> 270 ≤ 440		
	N3	N3.1	Free-cutting copper-alloys materials with excellent machining properties		–	–	
		N3.2		Short-chip copper-alloys with good to moderate machining properties	–	–	
		N3.3		Electrolytic copper and long-chip copper-alloys with moderate to poor machining properties	–	–	
	N4	N4.1	Thermoplastic polymers		–	–	
N4.2		Thermosetting polymers		–	–		
N4.3		Reinforced polymers or composites		–	–		
N5	N5.1	Graphite		–	–		
S	S1	S1.1	Titanium or titanium alloys		< 200 HB	≤ 660	
		S1.2		200 – 280 HB	> 660 ≤ 950		
		S1.3		280 – 360 HB	> 950 ≤ 1200		
	S2	S2.1	Fe-based high-temperature alloys		< 200 HB	≤ 690	
		S2.2		200 – 280 HB	> 690 ≤ 970		
	S3	S3.1	Ni-based high-temperature alloys		< 280 HB	≤ 940	
		S3.2		280 – 360 HB	> 940 ≤ 1200		
	S4	S4.1	Co-based high-temperature alloys		< 240 HB	≤ 800	
S4.2		240 – 320 HB		> 800 ≤ 1070			
H	H1	H1.1	Chilled cast iron		< 440 HB	–	
	H2	H2.1	Hardened cast iron		< 55 HRC	–	
		H2.2		> 55 HRC	–		
	H3	H3.1	Hardened steel <55 HRC		< 51 HRC	–	
		H3.2		51 – 55 HRC	–		
	H4	H4.1	Hardened steel >55 HRC		55 – 59 HRC	–	
H4.2		> 59 HRC		–			