




A130

DORMER

HSS Taper Shank Drill, Steam Tempered Finish

Versatile drill with larger diameters - up to 50.80mm (2 inches). Tapered shank provides a better grip for holding it in the machine. Conventional 118° point provides strength and makes it easy to regrind. Steam tempered finish retains cutting fluid and prevents chip to tool welding. Suitable for drilling many materials.

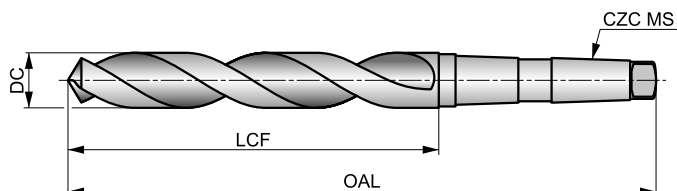

HSS	DIN 345	4xD
118°	ST	
λ 20-35°	R	DC h8

Workpiece material group suitability, starting values for cutting speed (m/min) and feed Alpha Code. Tables with feed per revolution can be found starting from page 175.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
33 I	37 I	38 I	28 I	25 F	22 E	18 F	14 F	12 E	11 F	9 E	7 D	21 E	17 E
M2.1	M2.2	M3.1	M3.2	M3.3	M4.1	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3	K3.1	K3.2
18 E	15 E	10 G	9 G	8 G	10 C	30 I	22 E	17 E	25 E	20 E	16 E	22 E	17 E
K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N1.1	N1.2	N1.3	N2.1	N2.2
13 E	20 E	15 E	11 E	10 E	8 E	23 E	17 E	13 E	26 J	20 J	13 I	43 H	39 H
N2.3	N3.1	N3.2	N3.3	N4.1	N4.2	N4.3	S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2
28 H	59 H	35 I	18 F	30 K	28 J	14 H	23 F	13 D	7 B	9 E	6 A	7 E	4 A
S4.1	S4.2												
5 E	3 A												

DC > 14mm Point Thinned.

Product	DC	DC	DC	LCF	OAL	CZC MS
	[inch]	[mm]	[inch]	[mm]	[mm]	
A1303.0	—	3.00	0.1181	33.0	114.0	MK 1
A1301/8	1/8	3.18	0.1252	36.0	117.0	MK 1
A1303.2	—	3.20	0.1260	36.0	117.0	MK 1
A1303.25	—	3.25	0.1280	36.0	117.0	MK 1
A1303.3	—	3.30	0.1299	36.0	117.0	MK 1
A1303.5	—	3.50	0.1378	39.0	120.0	MK 1
A1309/64	9/64	3.57	0.1406	39.0	120.0	MK 1
A1303.75	—	3.75	0.1476	39.0	120.0	MK 1
A1305/32	5/32	3.97	0.1563	43.0	124.0	MK 1
A1304.0	—	4.00	0.1575	43.0	124.0	MK 1
A1304.1	—	4.10	0.1614	43.0	124.0	MK 1
A1304.2	—	4.20	0.1654	43.0	124.0	MK 1
A1304.25	—	4.25	0.1673	43.0	124.0	MK 1
A13011/64	11/64	4.37	0.1719	47.0	128.0	MK 1
A1304.5	—	4.50	0.1772	47.0	128.0	MK 1
A1304.75	—	4.75	0.1870	52.0	128.0	MK 1
A1303/16	3/16	4.76	0.1875	52.0	133.0	MK 1
A1304.8	—	4.80	0.1890	52.0	133.0	MK 1
A1304.9	—	4.90	0.1929	52.0	133.0	MK 1
A1305.0	—	5.00	0.1969	52.0	133.0	MK 1
A1305.1	—	5.10	0.2008	52.0	133.0	MK 1
A13013/64	13/64	5.16	0.2031	52.0	133.0	MK 1
A1305.2	—	5.20	0.2047	52.0	133.0	MK 1



Product	DC	DC	DC	LCF	OAL	CZC MS
	[inch]	[mm]	[inch]	[mm]	[mm]	
A1305.25	—	5.25	0.2067	52.0	133.0	MK 1
A1305.4	—	5.40	0.2126	57.0	138.0	MK 1
A1305.5	—	5.50	0.2165	57.0	138.0	MK 1
A1307/32	7/32	5.56	0.2188	57.0	138.0	MK 1
A1305.7	—	5.70	0.2244	57.0	138.0	MK 1
A1305.75	—	5.75	0.2264	57.0	138.0	MK 1
A1305.8	—	5.80	0.2283	57.0	138.0	MK 1
A1305.9	—	5.90	0.2323	57.0	138.0	MK 1
A13015/64	15/64	5.95	0.2344	57.0	138.0	MK 1
A1306.0	—	6.00	0.2362	57.0	138.0	MK 1
A1306.1	—	6.10	0.2402	63.0	144.0	MK 1
A1306.2	—	6.20	0.2441	63.0	144.0	MK 1
A1306.25	—	6.25	0.2461	63.0	144.0	MK 1
A1306.3	—	6.30	0.2480	63.0	144.0	MK 1
A1301/4	1/4	6.35	0.2500	63.0	144.0	MK 1
A1306.4	—	6.40	0.2520	63.0	144.0	MK 1
A1306.5	—	6.50	0.2559	63.0	144.0	MK 1
A1306.6	—	6.60	0.2598	63.0	144.0	MK 1
A1306.7	—	6.70	0.2638	63.0	144.0	MK 1
A13017/64	17/64	6.75	0.2656	69.0	150.0	MK 1
A1306.75	—	6.75	0.2657	69.0	150.0	MK 1
A1306.8	—	6.80	0.2677	69.0	150.0	MK 1
A1306.9	—	6.90	0.2717	69.0	150.0	MK 1
A1307.0	—	7.00	0.2756	69.0	150.0	MK 1
A1309/32	9/32	7.14	0.2813	69.0	150.0	MK 1
A1307.2	—	7.20	0.2835	69.0	150.0	MK 1
A1307.25	—	7.25	0.2854	69.0	150.0	MK 1
A1307.3	—	7.30	0.2874	69.0	150.0	MK 1
A1307.4	—	7.40	0.2913	69.0	150.0	MK 1
A1307.5	—	7.50	0.2953	69.0	150.0	MK 1
A13019/64	19/64	7.54	0.2969	75.0	156.0	MK 1
A1307.7	—	7.70	0.3031	75.0	156.0	MK 1
A1307.75	—	7.75	0.3051	75.0	156.0	MK 1
A1307.8	—	7.80	0.3071	75.0	156.0	MK 1
A1307.9	—	7.90	0.3110	75.0	156.0	MK 1
A1305/16	5/16	7.94	0.3125	75.0	156.0	MK 1
A1308.0	—	8.00	0.3150	75.0	156.0	MK 1
A1308.1	—	8.10	0.3189	75.0	156.0	MK 1
A1308.2	—	8.20	0.3228	75.0	156.0	MK 1
A1308.25	—	8.25	0.3248	75.0	156.0	MK 1
A1308.3	—	8.30	0.3268	75.0	156.0	MK 1
A13021/64	21/64	8.33	0.3281	75.0	156.0	MK 1
A1308.4	—	8.40	0.3307	75.0	156.0	MK 1
A1308.5	—	8.50	0.3346	75.0	156.0	MK 1
A1308.6	—	8.60	0.3386	81.0	162.0	MK 1
A1308.7	—	8.70	0.3425	81.0	162.0	MK 1
A13011/32	11/32	8.73	0.3438	81.0	162.0	MK 1
A1308.75	—	8.75	0.3445	81.0	162.0	MK 1
A1308.8	—	8.80	0.3465	81.0	162.0	MK 1
A1308.9	—	8.90	0.3504	81.0	162.0	MK 1
A1309.0	—	9.00	0.3543	81.0	162.0	MK 1
A1309.1	—	9.10	0.3583	81.0	162.0	MK 1
A13023/64	23/64	9.13	0.3594	81.0	162.0	MK 1
A1309.2	—	9.20	0.3622	81.0	162.0	MK 1
A1309.25	—	9.25	0.3642	81.0	162.0	MK 1
A1309.3	—	9.30	0.3661	81.0	162.0	MK 1
A1309.5	—	9.50	0.3740	81.0	162.0	MK 1
A1303/8	3/8	9.52	0.3750	87.0	168.0	MK 1
A1309.6	—	9.60	0.3780	87.0	168.0	MK 1
A1309.7	—	9.70	0.3819	87.0	168.0	MK 1
A1309.75	—	9.75	0.3839	87.0	168.0	MK 1
A1309.8	—	9.80	0.3858	87.0	168.0	MK 1



Product	DC	DC	DC	LCF	OAL	CZC MS
	[inch]	[mm]	[inch]	[mm]	[mm]	
A1309.9	—	9.90	0.3898	87.0	168.0	MK 1
A13025/64	25/64	9.92	0.3906	87.0	168.0	MK 1
A13010.0	—	10.00	0.3937	87.0	168.0	MK 1
A13010.1	—	10.10	0.3976	87.0	168.0	MK 1
A13010.2	—	10.20	0.4016	87.0	168.0	MK 1
A13010.25	—	10.25	0.4035	87.0	168.0	MK 1
A13010.3	—	10.30	0.4055	87.0	168.0	MK 1
A13013/32	13/32	10.32	0.4063	87.0	168.0	MK 1
A13010.5	—	10.50	0.4134	87.0	168.0	MK 1
A13027/64	27/64	10.72	0.4219	94.0	175.0	MK 1
A13010.75	—	10.75	0.4232	94.0	175.0	MK 1
A13010.8	—	10.80	0.4252	94.0	175.0	MK 1
A13010.9	—	10.90	0.4291	94.0	175.0	MK 1
A13011.0	—	11.00	0.4331	94.0	175.0	MK 1
A13011.1	—	11.10	0.4370	94.0	175.0	MK 1
A1307/16	7/16	11.11	0.4375	94.0	175.0	MK 1
A13011.2	—	11.20	0.4409	94.0	175.0	MK 1
A13011.25	—	11.25	0.4429	94.0	175.0	MK 1
A13011.3	—	11.30	0.4449	94.0	175.0	MK 1
A13011.4	—	11.40	0.4488	94.0	175.0	MK 1
A13011.5	—	11.50	0.4528	94.0	175.0	MK 1
A13029/64	29/64	11.51	0.4531	94.0	175.0	MK 1
A13011.6	—	11.60	0.4567	94.0	175.0	MK 1
A13011.7	—	11.70	0.4606	94.0	175.0	MK 1
A13011.75	—	11.75	0.4626	94.0	175.0	MK 1
A13011.8	—	11.80	0.4646	94.0	175.0	MK 1
A13011.9	—	11.90	0.4685	101.0	182.0	MK 1
A13015/32	15/32	11.91	0.4688	101.0	182.0	MK 1
A13012.0	—	12.00	0.4724	101.0	182.0	MK 1
A13012.1	—	12.10	0.4764	101.0	182.0	MK 1
A13012.2	—	12.20	0.4803	101.0	182.0	MK 1
A13012.25	—	12.25	0.4823	101.0	182.0	MK 1
A13031/64	31/64	12.30	0.4844	101.0	182.0	MK 1
A13012.3	—	12.30	0.4843	101.0	182.0	MK 1
A13012.4	—	12.40	0.4882	101.0	182.0	MK 1
A13012.5	—	12.50	0.4921	101.0	182.0	MK 1
A13012.6	—	12.60	0.4961	101.0	182.0	MK 1
A13012.7	—	12.70	0.5000	101.0	182.0	MK 1
A1301/2	1/2	12.70	0.5000	101.0	182.0	MK 1
A13012.75	—	12.75	0.5020	101.0	182.0	MK 1
A13012.8	—	12.80	0.5039	101.0	182.0	MK 1
A13012.9	—	12.90	0.5079	101.0	182.0	MK 1
A13013.0	—	13.00	0.5118	101.0	182.0	MK 1
A13033/64	33/64	13.10	0.5156	101.0	182.0	MK 1
A13013.2	—	13.20	0.5197	101.0	182.0	MK 1
A13013.25	—	13.25	0.5217	108.0	189.0	MK 1
A13017/32	17/32	13.49	0.5313	108.0	189.0	MK 1
A13013.5	—	13.50	0.5315	108.0	189.0	MK 1
A13013.6	—	13.60	0.5354	108.0	189.0	MK 1
A13013.7	—	13.70	0.5394	108.0	189.0	MK 1
A13013.75	—	13.75	0.5413	108.0	189.0	MK 1
A13013.8	—	13.80	0.5433	108.0	189.0	MK 1
A13035/64	35/64	13.89	0.5469	108.0	189.0	MK 1
A13013.9	—	13.90	0.5472	108.0	189.0	MK 1
A13014.0	—	14.00	0.5512	108.0	189.0	MK 1
A13014.1	—	14.10	0.5551	114.0	212.0	MK 2
A13014.2	—	14.20	0.5591	114.0	212.0	MK 2
A13014.25	—	14.25	0.5610	114.0	212.0	MK 2
A1309/16	9/16	14.29	0.5625	114.0	212.0	MK 2
A13014.3	—	14.30	0.5630	114.0	212.0	MK 2
A13014.4	—	14.40	0.5669	114.0	212.0	MK 2
A13014.5	—	14.50	0.5709	114.0	212.0	MK 2



Product	DC	DC	DC	LCF	OAL	CZC MS
	[inch]	[mm]	[inch]	[mm]	[mm]	
A13014.6	—	14.60	0.5748	114.0	212.0	MK 2
A13037/64	37/64	14.68	0.5781	114.0	212.0	MK 2
A13014.7	—	14.70	0.5787	114.0	212.0	MK 2
A13014.75	—	14.75	0.5807	114.0	212.0	MK 2
A13014.8	—	14.80	0.5827	114.0	212.0	MK 2
A13014.9	—	14.90	0.5866	114.0	212.0	MK 2
A13015.0	—	15.00	0.5906	114.0	212.0	MK 2
A13019/32	19/32	15.08	0.5938	120.0	218.0	MK 2
A13015.1	—	15.10	0.5945	120.0	218.0	MK 2
A13015.2	—	15.20	0.5984	120.0	218.0	MK 2
A13015.25	—	15.25	0.6004	120.0	218.0	MK 2
A13039/64	39/64	15.48	0.6094	120.0	218.0	MK 2
A13015.5	—	15.50	0.6102	120.0	218.0	MK 2
A13015.7	—	15.70	0.6181	120.0	218.0	MK 2
A13015.75	—	15.75	0.6201	120.0	218.0	MK 2
A13015.8	—	15.80	0.6220	120.0	218.0	MK 2
A1305/8	5/8	15.88	0.6250	120.0	218.0	MK 2
A13015.9	—	15.90	0.6260	120.0	218.0	MK 2
A13016.0	—	16.00	0.6299	120.0	218.0	MK 2
A13016.1	—	16.10	0.6339	125.0	223.0	MK 2
A13016.2	—	16.20	0.6378	125.0	223.0	MK 2
A13016.25	—	16.25	0.6398	125.0	223.0	MK 2
A13041/64	41/64	16.27	0.6406	125.0	223.0	MK 2
A13016.5	—	16.50	0.6496	125.0	223.0	MK 2
A13021/32	21/32	16.67	0.6563	125.0	223.0	MK 2
A13016.75	—	16.75	0.6594	125.0	223.0	MK 2
A13017.0	—	17.00	0.6693	125.0	223.0	MK 2
A13043/64	43/64	17.07	0.6719	130.0	228.0	MK 2
A13017.25	—	17.25	0.6791	130.0	228.0	MK 2
A13011/16	11/16	17.46	0.6875	130.0	228.0	MK 2
A13017.5	—	17.50	0.6890	130.0	228.0	MK 2
A13017.75	—	17.75	0.6988	130.0	228.0	MK 2
A13045/64	45/64	17.86	0.7031	130.0	228.0	MK 2
A13018.0	—	18.00	0.7087	130.0	228.0	MK 2
A13018.25	—	18.25	0.7185	135.0	233.0	MK 2
A13023/32	23/32	18.26	0.7188	135.0	233.0	MK 2
A13018.5	—	18.50	0.7283	135.0	233.0	MK 2
A13047/64	47/64	18.65	0.7344	135.0	233.0	MK 2
A13018.75	—	18.75	0.7382	135.0	233.0	MK 2
A13019.0	—	19.00	0.7480	135.0	233.0	MK 2
A1303/4	3/4	19.05	0.7500	140.0	238.0	MK 2
A13019.25	—	19.25	0.7579	140.0	238.0	MK 2
A13049/64	49/64	19.45	0.7656	140.0	238.0	MK 2
A13019.5	—	19.50	0.7677	140.0	238.0	MK 2
A13019.75	—	19.75	0.7776	140.0	238.0	MK 2
A13025/32	25/32	19.84	0.7813	140.0	238.0	MK 2
A13020.0	—	20.00	0.7874	140.0	238.0	MK 2
A13051/64	51/64	20.24	0.7969	145.0	243.0	MK 2
A13020.25	—	20.25	0.7972	145.0	243.0	MK 2
A13020.4	—	20.40	0.8031	145.0	243.0	MK 2
A13020.5	—	20.50	0.8071	145.0	243.0	MK 2
A13013/16	13/16	20.64	0.8125	145.0	243.0	MK 2
A13020.75	—	20.75	0.8169	145.0	243.0	MK 2
A13021.0	—	21.00	0.8268	145.0	243.0	MK 2
A13053/64	53/64	21.03	0.8281	145.0	243.0	MK 2
A13021.25	—	21.25	0.8366	150.0	248.0	MK 2
A13027/32	27/32	21.43	0.8437	150.0	248.0	MK 2
A13021.5	—	21.50	0.8465	150.0	248.0	MK 2
A13021.75	—	21.75	0.8563	150.0	248.0	MK 2
A13055/64	55/64	21.83	0.8594	150.0	248.0	MK 2
A13022.0	—	22.00	0.8661	150.0	248.0	MK 2
A1307/8	7/8	22.22	0.8750	150.0	248.0	MK 2




Product	DC	DC	DC	LCF	OAL	CZC MS
	[inch]	[mm]	[inch]	[mm]	[mm]	
A13022.25	—	22.25	0.8760	150.0	248.0	MK 2
A13022.5	—	22.50	0.8858	155.0	253.0	MK 2
A13057/64	57/64	22.62	0.8906	155.0	253.0	MK 2
A13022.75	—	22.75	0.8957	155.0	253.0	MK 2
A13023.0	—	23.00	0.9055	155.0	253.0	MK 2
A13029/32	29/32	23.02	0.9063	155.0	253.0	MK 2
A13023.25	—	23.25	0.9154	155.0	276.0	MK 3
A13059/64	59/64	23.42	0.9219	155.0	276.0	MK 3
A13023.5	—	23.50	0.9252	155.0	276.0	MK 3
A13023.75	—	23.75	0.9350	160.0	281.0	MK 3
A13015/16	15/16	23.81	0.9375	160.0	281.0	MK 3
A13024.0	—	24.00	0.9449	160.0	281.0	MK 3
A13061/64	61/64	24.21	0.9531	160.0	281.0	MK 3
A13024.25	—	24.25	0.9547	160.0	281.0	MK 3
A13024.5	—	24.50	0.9646	160.0	281.0	MK 3
A13031/32	31/32	24.61	0.9688	160.0	281.0	MK 3
A13024.75	—	24.75	0.9744	160.0	281.0	MK 3
A13025.0	—	25.00	0.9843	160.0	281.0	MK 3
A13063/64	63/64	25.00	0.9844	160.0	286.0	MK 3
A13025.25	—	25.25	0.9941	165.0	286.0	MK 3
A1301	1"	25.40	1.0000	165.0	286.0	MK 3
A13025.5	—	25.50	1.0039	165.0	286.0	MK 3
A13025.75	—	25.75	1.0138	165.0	286.0	MK 3
A13026.0	—	26.00	1.0236	165.0	286.0	MK 3
A13026.25	—	26.25	1.0335	165.0	286.0	MK 3
A13026.5	—	26.50	1.0433	165.0	286.0	MK 3
A13026.75	—	26.75	1.0531	170.0	291.0	MK 3
A1301.1/16	1.1/16	26.99	1.0625	170.0	291.0	MK 3
A13027.0	—	27.00	1.0630	170.0	291.0	MK 3
A13027.25	—	27.25	1.0728	170.0	291.0	MK 3
A13027.5	—	27.50	1.0827	170.0	291.0	MK 3
A13027.75	—	27.75	1.0925	170.0	291.0	MK 3
A13028.0	—	28.00	1.1024	170.0	291.0	MK 3
A13028.25	—	28.25	1.1122	175.0	296.0	MK 3
A13028.5	—	28.50	1.1220	175.0	296.0	MK 3
A1301.1/8	1.1/8	28.58	1.1250	175.0	296.0	MK 3
A13028.75	—	28.75	1.1319	175.0	296.0	MK 3
A13029.0	—	29.00	1.1417	175.0	296.0	MK 3
A13029.25	—	29.25	1.1516	175.0	296.0	MK 3
A1301.5/32	1.5/32	29.37	1.1563	175.0	296.0	MK 3
A13029.5	—	29.50	1.1614	175.0	296.0	MK 3
A13029.75	—	29.75	1.1713	175.0	296.0	MK 3
A13030.0	—	30.00	1.1811	175.0	296.0	MK 3
A1301.3/16	1.3/16	30.16	1.1875	180.0	301.0	MK 3
A13030.25	—	30.25	1.1909	180.0	301.0	MK 3
A13030.5	—	30.50	1.2008	180.0	301.0	MK 3
A13030.75	—	30.75	1.2106	180.0	301.0	MK 3
A1301.7/32	1.7/32	30.96	1.2188	180.0	301.0	MK 3
A13031.0	—	31.00	1.2205	180.0	301.0	MK 3
A13031.25	—	31.25	1.2303	180.0	301.0	MK 3
A13031.5	—	31.50	1.2402	180.0	301.0	MK 3
A13031.75	—	31.75	1.2500	185.0	306.0	MK 3
A1301.1/4	1.1/4	31.75	1.2500	185.0	306.0	MK 3
A13032.0	—	32.00	1.2598	185.0	334.0	MK 4
A13032.5	—	32.50	1.2795	185.0	334.0	MK 4
A1301.9/32	1.9/32	32.54	1.2813	185.0	334.0	MK 4
A13033.0	—	33.00	1.2992	185.0	334.0	MK 4
A1301.5/16	1.5/16	33.34	1.3125	185.0	334.0	MK 4
A13033.5	—	33.50	1.3189	185.0	334.0	MK 4
A13034.0	—	34.00	1.3386	190.0	339.0	MK 4
A1301.11/32	1.11/32	34.13	1.3438	190.0	339.0	MK 4
A13034.5	—	34.50	1.3583	190.0	339.0	MK 4



Product	DC	DC	DC	LCF	OAL	CZC MS
	[inch]	[mm]	[inch]	[mm]	[mm]	
A1301.3/8	1.3/8	34.93	1.3750	190.0	339.0	MK 4
A13035.0	—	35.00	1.3780	190.0	339.0	MK 4
A13035.5	—	35.50	1.3976	190.0	339.0	MK 4
A1301.13/32	1.13/32	35.72	1.4063	195.0	344.0	MK 4
A13036.0	—	36.00	1.4173	195.0	344.0	MK 4
A13036.5	—	36.50	1.4370	195.0	344.0	MK 4
A1301.7/16	1.7/16	36.51	1.4375	195.0	344.0	MK 4
A13037.0	—	37.00	1.4567	195.0	344.0	MK 4
A13037.5	—	37.50	1.4764	195.0	344.0	MK 4
A13038.0	—	38.00	1.4961	200.0	349.0	MK 4
A1301.1/2	1.1/2	38.10	1.5000	200.0	349.0	MK 4
A13038.5	—	38.50	1.5157	200.0	349.0	MK 4
A13039.0	—	39.00	1.5354	200.0	349.0	MK 4
A13039.5	—	39.50	1.5551	200.0	349.0	MK 4
A1301.9/16	1.9/16	39.69	1.5625	200.0	349.0	MK 4
A13040.0	—	40.00	1.5748	200.0	349.0	MK 4
A13040.5	—	40.50	1.5945	205.0	354.0	MK 4
A13041.0	—	41.00	1.6142	205.0	354.0	MK 4
A1301.5/8	1.5/8	41.28	1.6250	205.0	354.0	MK 4
A13041.5	—	41.50	1.6339	205.0	354.0	MK 4
A13042.0	—	42.00	1.6535	205.0	354.0	MK 4
A13042.5	—	42.50	1.6732	205.0	354.0	MK 4
A1301.11/16	1.11/16	42.86	1.6875	210.0	359.0	MK 4
A13043.0	—	43.00	1.6929	210.0	359.0	MK 4
A13043.5	—	43.50	1.7126	210.0	359.0	MK 4
A13044.0	—	44.00	1.7323	210.0	359.0	MK 4
A1301.3/4	1.3/4	44.45	1.7500	210.0	359.0	MK 4
A13044.5	—	44.50	1.7520	210.0	359.0	MK 4
A13045.0	—	45.00	1.7717	210.0	359.0	MK 4
A13045.5	—	45.50	1.7913	215.0	364.0	MK 4
A13046.0	—	46.00	1.8110	215.0	364.0	MK 4
A13046.5	—	46.50	1.8307	215.0	364.0	MK 4
A13047.0	—	47.00	1.8504	215.0	364.0	MK 4
A13047.5	—	47.50	1.8701	215.0	364.0	MK 4
A13048.0	—	48.00	1.8898	220.0	369.0	MK 4
A13048.5	—	48.50	1.9094	220.0	369.0	MK 4
A13049.0	—	49.00	1.9291	220.0	369.0	MK 4
A13049.5	—	49.50	1.9488	220.0	369.0	MK 4
A13050.0	—	50.00	1.9685	220.0	369.0	MK 4
A1302	2"	50.80	2.0000	225.0	374.0	MK 4

DRILLING FEED RATE CHART

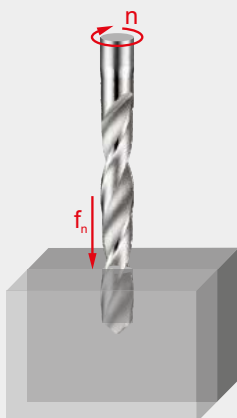

Feed per revolution (f_n in mm/rev)
Depending on the working conditions
it might be necessary to adjust these
values $\pm 25\%$.

How to use this table to find the feed per revolution (f_n):

1. Find your Alpha Code on the product page (example: 46J, "J" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per revolution (f_n).

		ø DC [mm]																		
		0.15	0.50	1.00	2.00	3.00	4.00	5.00	6.00	8.00	10.00	12.00	15.00	16.00	20.00	25.00	30.00	40.00	50.00	100.00
Feed rates	A	0.003	0.006	0.012	0.023	0.029	0.032	0.036	0.042	0.054	0.062	0.069	0.082	0.086	0.110	0.125	0.135	0.155	0.175	0.263
	B	0.004	0.007	0.014	0.028	0.037	0.041	0.046	0.053	0.067	0.080	0.090	0.103	0.108	0.135	0.153	0.165	0.188	0.208	0.312
	C	0.004	0.008	0.015	0.032	0.044	0.050	0.056	0.064	0.080	0.098	0.110	0.125	0.130	0.160	0.180	0.195	0.220	0.240	0.360
	D	0.004	0.008	0.016	0.038	0.053	0.060	0.068	0.078	0.098	0.119	0.130	0.149	0.155	0.188	0.210	0.228	0.253	0.275	0.413
	E	0.004	0.009	0.017	0.043	0.062	0.071	0.080	0.092	0.115	0.140	0.150	0.173	0.180	0.215	0.240	0.260	0.285	0.310	0.465
	F	0.005	0.009	0.018	0.050	0.073	0.084	0.095	0.109	0.138	0.165	0.178	0.202	0.210	0.248	0.275	0.295	0.320	0.343	0.515
	G	0.005	0.010	0.019	0.056	0.084	0.096	0.109	0.126	0.160	0.190	0.205	0.231	0.240	0.280	0.310	0.330	0.355	0.375	0.563
	H	0.005	0.010	0.020	0.066	0.102	0.116	0.130	0.150	0.190	0.228	0.243	0.271	0.280	0.320	0.355	0.375	0.398	0.418	0.627
	I	0.005	0.011	0.021	0.076	0.119	0.134	0.150	0.173	0.220	0.265	0.280	0.310	0.320	0.360	0.400	0.420	0.440	0.460	0.690
	J	0.006	0.012	0.024	0.084	0.135	0.152	0.170	0.197	0.250	0.298	0.315	0.349	0.360	0.405	0.445	0.465	0.485	0.503	0.755
	K	0.007	0.013	0.026	0.092	0.150	0.170	0.190	0.220	0.280	0.330	0.350	0.388	0.400	0.450	0.490	0.510	0.530	0.545	0.818
	L	0.007	0.014	0.028	0.101	0.165	0.186	0.208	0.240	0.305	0.360	0.385	0.419	0.430	0.485	0.525	0.545	0.568	0.588	0.882
	M	0.008	0.015	0.030	0.110	0.180	0.202	0.225	0.260	0.330	0.390	0.420	0.450	0.460	0.520	0.560	0.580	0.605	0.630	0.945
	N	0.008	0.016	0.032	0.119	0.195	0.218	0.242	0.280	0.355	0.420	0.455	0.481	0.490	0.555	0.595	0.615	0.642	0.672	1.008
	S	0.002	0.004	0.008	0.014	0.020	0.025	0.030	0.037	0.050	0.080	0.100	0.123	0.130	0.150	0.170	0.190	0.220	0.240	–
	T	0.004	0.008	0.015	0.028	0.040	0.050	0.060	0.070	0.090	0.110	0.130	0.160	0.170	0.190	0.210	0.230	0.260	0.275	–
	U	0.007	0.013	0.026	0.048	0.070	0.080	0.090	0.107	0.140	0.170	0.200	0.223	0.230	0.240	0.270	0.300	0.360	0.375	–
	V	0.010	0.019	0.038	0.069	0.100	0.115	0.130	0.153	0.200	0.250	0.280	0.310	0.320	0.340	0.400	0.440	0.510	0.530	–
	W	0.012	0.025	0.049	0.089	0.130	0.150	0.170	0.200	0.260	0.330	0.380	0.418	0.430	0.450	0.470	0.490	0.520	0.540	–
	X	0.014	0.028	0.056	0.103	0.150	0.180	0.210	0.250	0.330	0.420	0.480	0.533	0.550	0.580	–	–	–	–	–
	Y	0.017	0.034	0.068	0.124	0.180	0.220	0.260	0.317	0.430	0.550	0.700	0.700	0.700	0.740	–	–	–	–	–
	Z	0.024	0.047	0.094	0.172	0.250	0.325	0.400	0.533	0.800	1.000	1.100	1.175	1.200	1.200	–	–	–	–	–



WMG (WORK MATERIAL GROUP)

ISO group		WMG (Work Material Group)			Hardness (HB or HRC)	Ultimate Tensile Strength (MPa)	
P	P1	P1.1	Free machining steel (carbon steels with increased machinability)	Sulfurized	< 240 HB	≤ 830	
		P1.2		Sulfurized and phosphorized	< 180 HB	≤ 620	
		P1.3		Sulfurized/phosphorized and leaded	< 180 HB	≤ 620	
	P2	P2.1	Plain carbon steel (steels comprised of mainly iron and carbon)	Containing <0.25 % C	< 180 HB	≤ 620	
		P2.2		Containing <0.55 % C	< 240 HB	≤ 830	
		P2.3		Containing >0.55 % C	< 300 HB	≤ 1030	
	P3	P3.1	Alloy steel (carbon steels with an alloying content ≤ 10%)	Annealed	< 180 HB	≤ 620	
		P3.2		Hardened and tempered	180 – 260 HB	> 620 ≤ 900	
		P3.3			260 – 360 HB	> 900 ≤ 1240	
	P4	P4.1	Tool steel (special alloy steel for tools, dies and molds)	Annealed	< 26 HRC	≤ 900	
P4.2		Hardened and tempered		26 – 39 HRC	> 900 ≤ 1240		
P4.3				39 – 45 HRC	> 1240 ≤ 1450		
M	M1	M1.1	Ferritic stainless steel (straight chromium non-hardenable alloys)		< 160 HB	≤ 520	
		M1.2			160 – 220 HB	> 520 ≤ 700	
	M2	M2.1	Martensitic stainless steel (straight chromium hardenable alloys)	Annealed	< 200 HB	≤ 670	
		M2.2		Quenched and tempered	200 – 280 HB	> 670 ≤ 950	
	M3	M2.3	Precipitation-hardened	280 – 380 HB	> 950 ≤ 1300		
		M3.1	Austenitic stainless steel (chromium-nickel and chromium-nickel-manganese alloys)		< 200 HB	≤ 750	
		M3.2			200 – 260 HB	> 750 ≤ 870	
	M3.3			260 – 300 HB	> 870 ≤ 1040		
	M4	M4.1	Austenitic-ferritic (DUPLEX) or super-austenitic stainless steel		< 300 HB	≤ 990	
		M4.2		Precipitation hardening austenitic stainless steel	300 – 380 HB	≤ 1320	
K	K1	K1.1	Gray iron or Automotive Gray iron (GG) (iron-carbon castings with a lamellar graphite microstructure)	Ferritic or ferritic-pearlitic	< 180 HB	≤ 190	
		K1.2		Ferritic-pearlitic or pearlitic	180 – 240 HB	> 190 ≤ 310	
		K1.3		Pearlitic	240 – 280 HB	> 310 ≤ 390	
	K2	K2.1	Malleable iron (GTS/GTW) (iron-carbon castings with a graphite-free microstructure)	Ferritic	< 160 HB	≤ 400	
		K2.2		Ferritic or pearlitic	160 – 200 HB	> 400 ≤ 550	
		K2.3		Pearlitic	200 – 240 HB	> 550 ≤ 660	
	K3	K3.1	Ductile iron (GGG) (iron-carbon castings with a nodular graphite microstructure)	Ferritic	< 180 HB	≤ 560	
		K3.2		Ferritic or pearlitic	180 – 220 HB	> 560 ≤ 680	
		K3.3		Pearlitic	220 – 260 HB	> 680 ≤ 800	
	K4	K4.1	Austenitic gray iron (ASTM A436) (iron-carbon alloy castings with an austenitic lamellar graphite microstructure)		< 180 HB	≤ 190	
K4.2				< 240 HB	≤ 740		
K4.3		Austempered ductile iron (ASTM A897) (iron-carbon alloy castings with an ausferrite microstructure)		< 280 HB	> 840 ≤ 980		
K4.4				280 – 320 HB	> 980 ≤ 1130		
K4.5				320 – 360 HB	> 1130 ≤ 1280		
K5	K5.1	Compacted graphite iron CGI (ASTM A842) (iron-carbon castings with a vermicular graphite structure)	Ferritic	< 180 HB	≤ 400		
	K5.2		Ferritic-pearlitic	180 – 220 HB	> 400 ≤ 450		
	K5.3		Pearlitic	220 – 260 HB	> 450 ≤ 500		
N	N1	N1.1	Commercially pure wrought aluminium		< 60 HB	≤ 240	
		N1.2		Wrought aluminium alloys	Half hard tempered	60 – 100 HB	> 240 ≤ 400
		N1.3			Full hard tempered	100 – 150 HB	> 400 ≤ 590
	N2	N2.1	Cast aluminium alloys		< 75 HB	≤ 240	
		N2.2			75 – 90 HB	> 240 ≤ 270	
		N2.3			90 – 140 HB	> 270 ≤ 440	
	N3	N3.1	Free-cutting copper-alloys materials with excellent machining properties		–	–	
		N3.2		Short-chip copper-alloys with good to moderate machining properties	–	–	
		N3.3		Electrolytic copper and long-chip copper-alloys with moderate to poor machining properties	–	–	
	N4	N4.1	Thermoplastic polymers		–	–	
N4.2		Thermosetting polymers		–	–		
N4.3		Reinforced polymers or composites		–	–		
N5	N5.1	Graphite		–	–		
S	S1	S1.1	Titanium or titanium alloys		< 200 HB	≤ 660	
		S1.2			200 – 280 HB	> 660 ≤ 950	
		S1.3			280 – 360 HB	> 950 ≤ 1200	
	S2	S2.1	Fe-based high-temperature alloys		< 200 HB	≤ 690	
		S2.2			200 – 280 HB	> 690 ≤ 970	
	S3	S3.1	Ni-based high-temperature alloys		< 280 HB	≤ 940	
		S3.2			280 – 360 HB	> 940 ≤ 1200	
	S4	S4.1	Co-based high-temperature alloys		< 240 HB	≤ 800	
S4.2				240 – 320 HB	> 800 ≤ 1070		
H	H1	H1.1	Chilled cast iron		< 440 HB	–	
	H2	H2.1	Hardened cast iron		< 55 HRC	–	
		H2.2			> 55 HRC	–	
	H3	H3.1	Hardened steel <55 HRC		< 51 HRC	–	
		H3.2			51 – 55 HRC	–	
	H4	H4.1	Hardened steel >55 HRC		55 – 59 HRC	–	
H4.2				> 59 HRC	–		