




A350

DORMER



HSS Long Series Taper Shank Drill, Steam Tempered Finish

Recommended for drilling deep holes or for applications where increased reach is required. Steam tempered finish retains cutting fluid and prevents chip to tool welding. A 118° point angle is easy to regrind and provides strength. Suitable for drilling many materials.

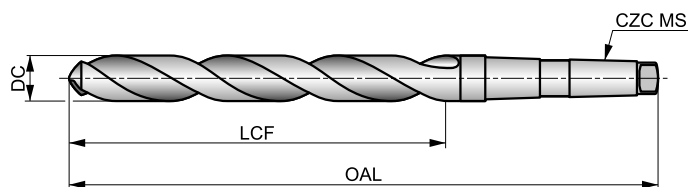

HSS	DIN 341	6×D
118°	ST	
λ 20-35°	R	DC h8

Workpiece material group suitability, starting values for cutting speed (m/min) and feed Alpha Code. Tables with feed per revolution can be found starting from page 175.

P1.1 27 I	P1.2 30 I	P1.3 31 I	P2.1 23 I	P2.2 20 G	P2.3 18 E	P3.1 15 F	P3.2 12 F	P3.3 10 E	P4.1 9 F	P4.2 7 E	P4.3 6 D	M1.1 18 E	M1.2 15 E
M2.1 16 E	M2.2 13 E	M3.1 5 G	M3.2 4 G	M3.3 4 G	M4.1 8 C	K1.1 26 I	K1.2 19 F	K1.3 14 F	K2.1 22 E	K2.2 18 E	K2.3 14 E	K3.1 20 E	K3.2 15 E
K3.3 12 E	K4.1 18 E	K4.2 14 E	K4.3 10 E	K4.4 9 E	K4.5 7 E	K5.1 21 E	K5.2 15 E	K5.3 12 E	N1.1 33 J	N1.2 25 J	N1.3 17 I	N2.1 42 H	N2.2 37 H
N2.3 27 H	N3.1 59 H	N3.2 35 I	N3.3 18 F	N4.1 35 L	N4.2 26 J	N4.3 12 H	S1.1 16 F	S1.2 9 D	S1.3 5 B	S2.1 5 E	S2.2 4 A	S3.1 4 E	S3.2 3 A
S4.1 3 E	S4.2 2 A												

Product	DC [mm]	DC [inch]	LCF [mm]	OAL [mm]	CZC MS
A3505.0	5.00	0.1969	74.0	155.0	MK 1
A3505.5	5.50	0.2165	80.0	161.0	MK 1
A3506.0	6.00	0.2362	80.0	161.0	MK 1
A3506.7	6.70	0.2638	86.0	167.0	MK 1
A3506.8	6.80	0.2677	93.0	174.0	MK 1
A3507.0	7.00	0.2756	93.0	174.0	MK 1
A3507.5	7.50	0.2953	93.0	174.0	MK 1
A3508.0	8.00	0.3150	100.0	181.0	MK 1
A3508.4	8.40	0.3307	100.0	181.0	MK 1
A3508.5	8.50	0.3346	100.0	181.0	MK 1
A3508.75	8.75	0.3445	107.0	188.0	MK 1
A3509.0	9.00	0.3543	107.0	188.0	MK 1
A3509.5	9.50	0.3740	107.0	188.0	MK 1
A3509.8	9.80	0.3858	116.0	197.0	MK 1
A35010.0	10.00	0.3937	116.0	197.0	MK 1
A35010.2	10.20	0.4016	116.0	197.0	MK 1
A35010.5	10.50	0.4134	116.0	197.0	MK 1
A35010.7	10.70	0.4213	125.0	206.0	MK 1
A35011.0	11.00	0.4331	125.0	206.0	MK 1
A35011.5	11.50	0.4528	125.0	206.0	MK 1
A35011.75	11.75	0.4626	125.0	206.0	MK 1
A35011.8	11.80	0.4646	125.0	206.0	MK 1
A35012.0	12.00	0.4724	134.0	215.0	MK 1
A35012.5	12.50	0.4921	134.0	215.0	MK 1


Product	DC [mm]	DC [inch]	LCF [mm]	OAL [mm]	CZC MS
A35013.0	13.00	0.5118	134.0	215.0	MK 1
A35013.5	13.50	0.5315	142.0	223.0	MK 1
A35014.0	14.00	0.5512	142.0	223.0	MK 1
A35014.25	14.25	0.5610	147.0	245.0	MK 2
A35014.5	14.50	0.5709	147.0	245.0	MK 2
A35014.75	14.75	0.5807	147.0	245.0	MK 2
A35015.0	15.00	0.5906	147.0	245.0	MK 2
A35015.25	15.25	0.6004	153.0	251.0	MK 2
A35015.5	15.50	0.6102	153.0	251.0	MK 2
A35015.75	15.75	0.6201	153.0	251.0	MK 2
A35016.0	16.00	0.6299	153.0	251.0	MK 2
A35016.25	16.25	0.6398	159.0	257.0	MK 2
A35016.5	16.50	0.6496	159.0	257.0	MK 2
A35016.75	16.75	0.6594	159.0	257.0	MK 2
A35017.0	17.00	0.6693	159.0	257.0	MK 2
A35017.25	17.25	0.6791	165.0	263.0	MK 2
A35017.5	17.50	0.6890	165.0	263.0	MK 2
A35018.0	18.00	0.7087	165.0	263.0	MK 2
A35018.5	18.50	0.7283	171.0	269.0	MK 2
A35019.0	19.00	0.7480	171.0	269.0	MK 2
A35019.5	19.50	0.7677	177.0	275.0	MK 2
A35019.75	19.75	0.7776	177.0	275.0	MK 2
A35020.0	20.00	0.7874	177.0	275.0	MK 2
A35020.25	20.25	0.7972	184.0	282.0	MK 2



Product	DC	DC	LCF	OAL	CZC MS
	[mm]	[inch]	[mm]	[mm]	
A35020.5	20.50	0.8071	184.0	282.0	MK 2
A35021.0	21.00	0.8268	184.0	282.0	MK 2
A35021.5	21.50	0.8465	191.0	289.0	MK 2
A35022.0	22.00	0.8661	191.0	289.0	MK 2
A35022.5	22.50	0.8858	198.0	296.0	MK 2
A35023.0	23.00	0.9055	198.0	296.0	MK 2
A35023.5	23.50	0.9252	198.0	319.0	MK 3
A35024.0	24.00	0.9449	206.0	327.0	MK 3
A35024.5	24.50	0.9646	206.0	327.0	MK 3
A35025.0	25.00	0.9843	206.0	327.0	MK 3
A35025.5	25.50	1.0039	214.0	335.0	MK 3
A35026.0	26.00	1.0236	214.0	335.0	MK 3
A35026.5	26.50	1.0433	214.0	335.0	MK 3
A35027.0	27.00	1.0630	222.0	343.0	MK 3
A35027.5	27.50	1.0827	222.0	343.0	MK 3
A35028.0	28.00	1.1024	222.0	343.0	MK 3
A35029.0	29.00	1.1417	230.0	351.0	MK 3
A35030.0	30.00	1.1811	230.0	351.0	MK 3
A35030.5	30.50	1.2008	239.0	360.0	MK 3
A35031.0	31.00	1.2205	239.0	360.0	MK 3

Product	DC	DC	LCF	OAL	CZC MS
	[mm]	[inch]	[mm]	[mm]	
A35031.5	31.50	1.2402	239.0	360.0	MK 3
A35032.0	32.00	1.2598	248.0	397.0	MK 4
A35033.0	33.00	1.2992	248.0	397.0	MK 4
A35034.0	34.00	1.3386	257.0	406.0	MK 4
A35035.0	35.00	1.3780	257.0	406.0	MK 4
A35036.0	36.00	1.4173	267.0	416.0	MK 4
A35037.0	37.00	1.4567	267.0	416.0	MK 4
A35038.0	38.00	1.4961	277.0	426.0	MK 4
A35039.0	39.00	1.5354	277.0	426.0	MK 4
A35040.0	40.00	1.5748	277.0	426.0	MK 4
A35041.0	41.00	1.6142	287.0	436.0	MK 4
A35042.0	42.00	1.6535	287.0	436.0	MK 4
A35043.0	43.00	1.6929	298.0	447.0	MK 4
A35044.0	44.00	1.7323	298.0	447.0	MK 4
A35045.0	45.00	1.7717	298.0	447.0	MK 4
A35046.0	46.00	1.8110	310.0	459.0	MK 4
A35047.0	47.00	1.8504	310.0	459.0	MK 4
A35048.0	48.00	1.8898	321.0	470.0	MK 4
A35050.0	50.00	1.9685	321.0	470.0	MK 4

DRILLING FEED RATE CHART

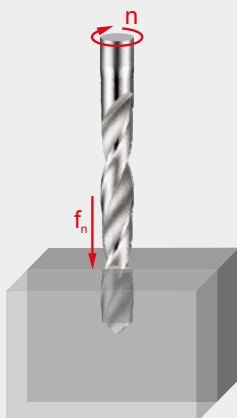

Feed per revolution (f_n in mm/rev)
Depending on the working conditions
it might be necessary to adjust these
values $\pm 25\%$.

How to use this table to find the feed per revolution (f_n):

1. Find your Alpha Code on the product page (example: 46J, "J" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per revolution (f_n).

		ø DC [mm]																		
		0.15	0.50	1.00	2.00	3.00	4.00	5.00	6.00	8.00	10.00	12.00	15.00	16.00	20.00	25.00	30.00	40.00	50.00	100.00
Feed rates	A	0.003	0.006	0.012	0.023	0.029	0.032	0.036	0.042	0.054	0.062	0.069	0.082	0.086	0.110	0.125	0.135	0.155	0.175	0.263
	B	0.004	0.007	0.014	0.028	0.037	0.041	0.046	0.053	0.067	0.080	0.090	0.103	0.108	0.135	0.153	0.165	0.188	0.208	0.312
	C	0.004	0.008	0.015	0.032	0.044	0.050	0.056	0.064	0.080	0.098	0.110	0.125	0.130	0.160	0.180	0.195	0.220	0.240	0.360
	D	0.004	0.008	0.016	0.038	0.053	0.060	0.068	0.078	0.098	0.119	0.130	0.149	0.155	0.188	0.210	0.228	0.253	0.275	0.413
	E	0.004	0.009	0.017	0.043	0.062	0.071	0.080	0.092	0.115	0.140	0.150	0.173	0.180	0.215	0.240	0.260	0.285	0.310	0.465
	F	0.005	0.009	0.018	0.050	0.073	0.084	0.095	0.109	0.138	0.165	0.178	0.202	0.210	0.248	0.275	0.295	0.320	0.343	0.515
	G	0.005	0.010	0.019	0.056	0.084	0.096	0.109	0.126	0.160	0.190	0.205	0.231	0.240	0.280	0.310	0.330	0.355	0.375	0.563
	H	0.005	0.010	0.020	0.066	0.102	0.116	0.130	0.150	0.190	0.228	0.243	0.271	0.280	0.320	0.355	0.375	0.398	0.418	0.627
	I	0.005	0.011	0.021	0.076	0.119	0.134	0.150	0.173	0.220	0.265	0.280	0.310	0.320	0.360	0.400	0.420	0.440	0.460	0.690
	J	0.006	0.012	0.024	0.084	0.135	0.152	0.170	0.197	0.250	0.298	0.315	0.349	0.360	0.405	0.445	0.465	0.485	0.503	0.755
	K	0.007	0.013	0.026	0.092	0.150	0.170	0.190	0.220	0.280	0.330	0.350	0.388	0.400	0.450	0.490	0.510	0.530	0.545	0.818
	L	0.007	0.014	0.028	0.101	0.165	0.186	0.208	0.240	0.305	0.360	0.385	0.419	0.430	0.485	0.525	0.545	0.568	0.588	0.882
	M	0.008	0.015	0.030	0.110	0.180	0.202	0.225	0.260	0.330	0.390	0.420	0.450	0.460	0.520	0.560	0.580	0.605	0.630	0.945
	N	0.008	0.016	0.032	0.119	0.195	0.218	0.242	0.280	0.355	0.420	0.455	0.481	0.490	0.555	0.595	0.615	0.642	0.672	1.008
	S	0.002	0.004	0.008	0.014	0.020	0.025	0.030	0.037	0.050	0.080	0.100	0.123	0.130	0.150	0.170	0.190	0.220	0.240	–
	T	0.004	0.008	0.015	0.028	0.040	0.050	0.060	0.070	0.090	0.110	0.130	0.160	0.170	0.190	0.210	0.230	0.260	0.275	–
	U	0.007	0.013	0.026	0.048	0.070	0.080	0.090	0.107	0.140	0.170	0.200	0.223	0.230	0.240	0.270	0.300	0.360	0.375	–
	V	0.010	0.019	0.038	0.069	0.100	0.115	0.130	0.153	0.200	0.250	0.280	0.310	0.320	0.340	0.400	0.440	0.510	0.530	–
	W	0.012	0.025	0.049	0.089	0.130	0.150	0.170	0.200	0.260	0.330	0.380	0.418	0.430	0.450	0.470	0.490	0.520	0.540	–
	X	0.014	0.028	0.056	0.103	0.150	0.180	0.210	0.250	0.330	0.420	0.480	0.533	0.550	0.580	–	–	–	–	–
	Y	0.017	0.034	0.068	0.124	0.180	0.220	0.260	0.317	0.430	0.550	0.700	0.700	0.700	0.740	–	–	–	–	–
	Z	0.024	0.047	0.094	0.172	0.250	0.325	0.400	0.533	0.800	1.000	1.100	1.175	1.200	1.200	–	–	–	–	–



WMG (WORK MATERIAL GROUP)

ISO group		WMG (Work Material Group)			Hardness (HB or HRC)	Ultimate Tensile Strength (MPa)	
P	P1	P1.1	Free machining steel (carbon steels with increased machinability)	Sulfurized	< 240 HB	≤ 830	
		P1.2		Sulfurized and phosphorized	< 180 HB	≤ 620	
		P1.3		Sulfurized/phosphorized and leaded	< 180 HB	≤ 620	
	P2	P2.1	Plain carbon steel (steels comprised of mainly iron and carbon)	Containing <0.25 % C	< 180 HB	≤ 620	
		P2.2		Containing <0.55 % C	< 240 HB	≤ 830	
		P2.3		Containing >0.55 % C	< 300 HB	≤ 1030	
	P3	P3.1	Alloy steel (carbon steels with an alloying content ≤ 10%)	Annealed	< 180 HB	≤ 620	
		P3.2		Hardened and tempered	180 – 260 HB	> 620 ≤ 900	
		P3.3			260 – 360 HB	> 900 ≤ 1240	
	P4	P4.1	Tool steel (special alloy steel for tools, dies and molds)	Annealed	< 26 HRC	≤ 900	
P4.2		Hardened and tempered		26 – 39 HRC	> 900 ≤ 1240		
P4.3				39 – 45 HRC	> 1240 ≤ 1450		
M	M1	M1.1	Ferritic stainless steel (straight chromium non-hardenable alloys)		< 160 HB	≤ 520	
		M1.2			160 – 220 HB	> 520 ≤ 700	
	M2	M2.1	Martensitic stainless steel (straight chromium hardenable alloys)	Annealed	< 200 HB	≤ 670	
		M2.2		Quenched and tempered	200 – 280 HB	> 670 ≤ 950	
		M2.3		Precipitation-hardened	280 – 380 HB	> 950 ≤ 1300	
	M3	M3.1	Austenitic stainless steel (chromium-nickel and chromium-nickel-manganese alloys)		< 200 HB	≤ 750	
		M3.2			200 – 260 HB	> 750 ≤ 870	
		M3.3			260 – 300 HB	> 870 ≤ 1040	
	M4	M4.1	Austenitic-ferritic (DUPLEX) or super-austenitic stainless steel		< 300 HB	≤ 990	
		M4.2		Precipitation hardening austenitic stainless steel	300 – 380 HB	≤ 1320	
K	K1	K1.1	Gray iron or Automotive Gray iron (GG) (iron-carbon castings with a lamellar graphite microstructure)	Ferritic or ferritic-pearlitic	< 180 HB	≤ 190	
		K1.2		Ferritic-pearlitic or pearlitic	180 – 240 HB	> 190 ≤ 310	
		K1.3		Pearlitic	240 – 280 HB	> 310 ≤ 390	
	K2	K2.1	Malleable iron (GTS/GTW) (iron-carbon castings with a graphite-free microstructure)	Ferritic	< 160 HB	≤ 400	
		K2.2		Ferritic or pearlitic	160 – 200 HB	> 400 ≤ 550	
		K2.3		Pearlitic	200 – 240 HB	> 550 ≤ 660	
	K3	K3.1	Ductile iron (GGG) (iron-carbon castings with a nodular graphite microstructure)	Ferritic	< 180 HB	≤ 560	
		K3.2		Ferritic or pearlitic	180 – 220 HB	> 560 ≤ 680	
		K3.3		Pearlitic	220 – 260 HB	> 680 ≤ 800	
	K4	K4.1	Austenitic gray iron (ASTM A436) (iron-carbon alloy castings with an austenitic lamellar graphite microstructure)		< 180 HB	≤ 190	
K4.2		Austenitic ductile iron (ASTM A439 or ASTM A571) (iron-carbon alloy castings with an austenitic nodular graphite microstructure)		< 240 HB	≤ 740		
K4.3		Austempered ductile iron (ASTM A897) (iron-carbon alloy castings with an ausferrite microstructure)		< 280 HB	> 840 ≤ 980		
K4.4	280 – 320 HB		> 980 ≤ 1130				
K4.5	320 – 360 HB		> 1130 ≤ 1280				
K5	K5.1	Compacted graphite iron CGI (ASTM A842) (iron-carbon castings with a vermicular graphite structure)	Ferritic	< 180 HB	≤ 400		
	K5.2		Ferritic-pearlitic	180 – 220 HB	> 400 ≤ 450		
	K5.3		Pearlitic	220 – 260 HB	> 450 ≤ 500		
N	N1	N1.1	Commercially pure wrought aluminium		< 60 HB	≤ 240	
		N1.2		Wrought aluminium alloys	Half hard tempered	60 – 100 HB	> 240 ≤ 400
		N1.3			Full hard tempered	100 – 150 HB	> 400 ≤ 590
	N2	N2.1	Cast aluminium alloys		< 75 HB	≤ 240	
		N2.2			75 – 90 HB	> 240 ≤ 270	
		N2.3			90 – 140 HB	> 270 ≤ 440	
	N3	N3.1	Free-cutting copper-alloys materials with excellent machining properties		–	–	
		N3.2		Short-chip copper-alloys with good to moderate machining properties	–	–	
		N3.3		Electrolytic copper and long-chip copper-alloys with moderate to poor machining properties	–	–	
	N4	N4.1	Thermoplastic polymers		–	–	
N4.2		Thermosetting polymers		–	–		
N4.3		Reinforced polymers or composites		–	–		
N5	N5.1	Graphite		–	–		
S	S1	S1.1	Titanium or titanium alloys		< 200 HB	≤ 660	
		S1.2			200 – 280 HB	> 660 ≤ 950	
		S1.3			280 – 360 HB	> 950 ≤ 1200	
	S2	S2.1	Fe-based high-temperature alloys		< 200 HB	≤ 690	
		S2.2			200 – 280 HB	> 690 ≤ 970	
	S3	S3.1	Ni-based high-temperature alloys		< 280 HB	≤ 940	
		S3.2			280 – 360 HB	> 940 ≤ 1200	
	S4	S4.1	Co-based high-temperature alloys		< 240 HB	≤ 800	
S4.2				240 – 320 HB	> 800 ≤ 1070		
H	H1	H1.1	Chilled cast iron		< 440 HB	–	
	H2	H2.1	Hardened cast iron		< 55 HRC	–	
		H2.2			> 55 HRC	–	
	H3	H3.1	Hardened steel <55 HRC		< 51 HRC	–	
		H3.2			51 – 55 HRC	–	
	H4	H4.1	Hardened steel >55 HRC		55 – 59 HRC	–	
H4.2				> 59 HRC	–		