

5xD

TiAlN




m7



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC205D030030S	BLDE205D030030S	3,0	6	28	-	-	66	-	2
BLDC205D031030S	BLDE205D031030S	3,1	6	28	-	-	66	-	2
BLDC205D032030S	BLDE205D032030S	3,2	6	28	-	-	66	-	2
BLDC205D033030S	BLDE205D033030S	3,3	6	28	-	-	66	-	2
BLDC205D034030S	BLDE205D034030S	3,4	6	28	-	-	66	-	2
BLDC205D035030S	BLDE205D035030S	3,5	6	28	-	-	66	-	2
BLDC205D036030S	BLDE205D036030S	3,6	6	28	-	-	66	-	2
BLDC205D037030S	BLDE205D037030S	3,7	6	28	-	-	66	-	2
BLDC205D038030S	BLDE205D038030S	3,8	6	36	-	-	74	-	2
BLDC205D039030S	BLDE205D039030S	3,9	6	36	-	-	74	-	2
BLDC205D040030S	BLDE205D040030S	4,0	6	36	-	-	74	-	2
BLDC205D041030S	BLDE205D041030S	4,1	6	36	-	-	74	-	2
BLDC205D042030S	BLDE205D042030S	4,2	6	36	-	-	74	-	2
BLDC205D043030S	BLDE205D043030S	4,3	6	36	-	-	74	-	2
BLDC205D044030S	BLDE205D044030S	4,4	6	36	-	-	74	-	2
BLDC205D045030S	BLDE205D045030S	4,5	6	36	-	-	74	-	2
BLDC205D046030S	BLDE205D046030S	4,6	6	36	-	-	74	-	2
BLDC205D046530S	BLDE205D046530S	4,65	6	36	-	-	74	-	2
BLDC205D047030S	BLDE205D047030S	4,7	6	36	-	-	74	-	2
BLDC205D048030S	BLDE205D048030S	4,8	6	44	-	-	82	-	2
BLDC205D049030S	BLDE205D049030S	4,9	6	44	-	-	82	-	2
BLDC205D050030S	BLDE205D050030S	5,0	6	44	-	-	82	-	2
BLDC205D051030S	BLDE205D051030S	5,1	6	44	-	-	82	-	2
BLDC205D052030S	BLDE205D052030S	5,2	6	44	-	-	82	-	2
BLDC205D053030S	BLDE205D053030S	5,3	6	44	-	-	82	-	2
BLDC205D054030S	BLDE205D054030S	5,4	6	44	-	-	82	-	2
BLDC205D055030S	BLDE205D055030S	5,5	6	44	-	-	82	-	2
BLDC205D055530S	BLDE205D055530S	5,55	6	44	-	-	82	-	2
BLDC205D056030S	BLDE205D056030S	5,6	6	44	-	-	82	-	2
BLDC205D057030S	BLDE205D057030S	5,7	6	44	-	-	82	-	2
BLDC205D058030S	BLDE205D058030S	5,8	6	44	-	-	82	-	2
BLDC205D059030S	BLDE205D059030S	5,9	6	44	-	-	82	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

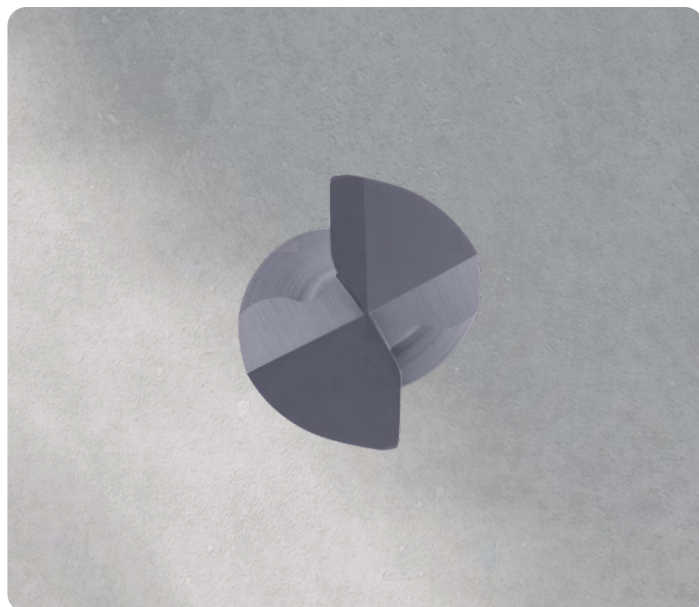

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-

5xD

TiAlN




m7



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC205D060030S	BLDE205D060030S	6,0	6	44	-	-	82	-	2
BLDC205D061030S	BLDE205D061030S	6,1	8	53	-	-	91	-	2
BLDC205D062030S	BLDE205D062030S	6,2	8	53	-	-	91	-	2
BLDC205D063030S	BLDE205D063030S	6,3	8	53	-	-	91	-	2
BLDC205D064030S	BLDE205D064030S	6,4	8	53	-	-	91	-	2
BLDC205D065030S	BLDE205D065030S	6,5	8	53	-	-	91	-	2
BLDC205D066030S	BLDE205D066030S	6,6	8	53	-	-	91	-	2
BLDC205D067030S	BLDE205D067030S	6,7	8	53	-	-	91	-	2
BLDC205D068030S	BLDE205D068030S	6,8	8	53	-	-	91	-	2
BLDC205D069030S	BLDE205D069030S	6,9	8	53	-	-	91	-	2
BLDC205D070030S	BLDE205D070030S	7,0	8	53	-	-	91	-	2
BLDC205D071030S	BLDE205D071030S	7,1	8	53	-	-	91	-	2
BLDC205D072030S	BLDE205D072030S	7,2	8	53	-	-	91	-	2
BLDC205D073030S	BLDE205D073030S	7,3	8	53	-	-	91	-	2
BLDC205D074030S	BLDE205D074030S	7,4	8	53	-	-	91	-	2
BLDC205D075030S	BLDE205D075030S	7,5	8	53	-	-	91	-	2
BLDC205D076030S	BLDE205D076030S	7,6	8	53	-	-	91	-	2
BLDC205D077030S	BLDE205D077030S	7,7	8	53	-	-	91	-	2
BLDC205D078030S	BLDE205D078030S	7,8	8	53	-	-	91	-	2
BLDC205D079030S	BLDE205D079030S	7,9	8	53	-	-	91	-	2
BLDC205D080030S	BLDE205D080030S	8,0	8	53	-	-	91	-	2
BLDC205D081030S	BLDE205D081030S	8,1	10	61	-	-	103	-	2
BLDC205D082030S	BLDE205D082030S	8,2	10	61	-	-	103	-	2
BLDC205D083030S	BLDE205D083030S	8,3	10	61	-	-	103	-	2
BLDC205D084030S	BLDE205D084030S	8,4	10	61	-	-	103	-	2
BLDC205D085030S	BLDE205D085030S	8,5	10	61	-	-	103	-	2
BLDC205D086030S	BLDE205D086030S	8,6	10	61	-	-	103	-	2
BLDC205D087030S	BLDE205D087030S	8,7	10	61	-	-	103	-	2
BLDC205D088030S	BLDE205D088030S	8,8	10	61	-	-	103	-	2
BLDC205D089030S	BLDE205D089030S	8,9	10	61	-	-	103	-	2
BLDC205D090030S	BLDE205D090030S	9,0	10	61	-	-	103	-	2
BLDC205D091030S	BLDE205D091030S	9,1	10	61	-	-	103	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

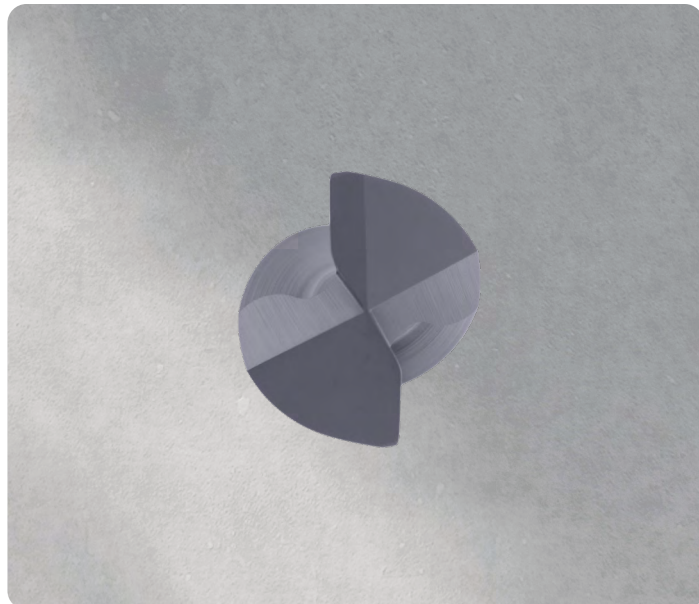


 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC205D092030S	BLDE205D092030S	9,2	10	61	-	-	103	-	2
BLDC205D093030S	BLDE205D093030S	9,3	10	61	-	-	103	-	2
BLDC205D094030S	BLDE205D094030S	9,4	10	61	-	-	103	-	2
BLDC205D095030S	BLDE205D095030S	9,5	10	61	-	-	103	-	2
BLDC205D096030S	BLDE205D096030S	9,6	10	61	-	-	103	-	2
BLDC205D097030S	BLDE205D097030S	9,7	10	61	-	-	103	-	2
BLDC205D098030S	BLDE205D098030S	9,8	10	61	-	-	103	-	2
BLDC205D099030S	BLDE205D099030S	9,9	10	61	-	-	103	-	2
BLDC205D100030S	BLDE205D100030S	10,0	10	61	-	-	103	-	2
BLDC205D101030S	BLDE205D101030S	10,1	12	71	-	-	118	-	2
BLDC205D102030S	BLDE205D102030S	10,2	12	71	-	-	118	-	2
BLDC205D103030S	BLDE205D103030S	10,3	12	71	-	-	118	-	2
BLDC205D104030S	BLDE205D104030S	10,4	12	71	-	-	118	-	2
BLDC205D105030S	BLDE205D105030S	10,5	12	71	-	-	118	-	2
BLDC205D106030S	BLDE205D106030S	10,6	12	71	-	-	118	-	2
BLDC205D107030S	BLDE205D107030S	10,7	12	71	-	-	118	-	2
BLDC205D108030S	BLDE205D108030S	10,8	12	71	-	-	118	-	2
BLDC205D109030S	BLDE205D109030S	10,9	12	71	-	-	118	-	2
BLDC205D110030S	BLDE205D110030S	11,0	12	71	-	-	118	-	2
BLDC205D111030S	BLDE205D111030S	11,1	12	71	-	-	118	-	2
BLDC205D112030S	BLDE205D112030S	11,2	12	71	-	-	118	-	2
BLDC205D113030S	BLDE205D113030S	11,3	12	71	-	-	118	-	2
BLDC205D114030S	BLDE205D114030S	11,4	12	71	-	-	118	-	2
BLDC205D115030S	BLDE205D115030S	11,5	12	71	-	-	118	-	2
BLDC205D116030S	BLDE205D116030S	11,6	12	71	-	-	118	-	2
BLDC205D117030S	BLDE205D117030S	11,7	12	71	-	-	118	-	2
BLDC205D118030S	BLDE205D118030S	11,8	12	71	-	-	118	-	2
BLDC205D119030S	BLDE205D119030S	11,9	12	71	-	-	118	-	2
BLDC205D120030S	BLDE205D120030S	12,0	12	71	-	-	118	-	2
BLDC205D121030S	BLDE205D121030S	12,1	14	77	-	-	124	-	2
BLDC205D122030S	BLDE205D122030S	12,2	14	77	-	-	124	-	2
BLDC205D123030S	BLDE205D123030S	12,3	14	77	-	-	124	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

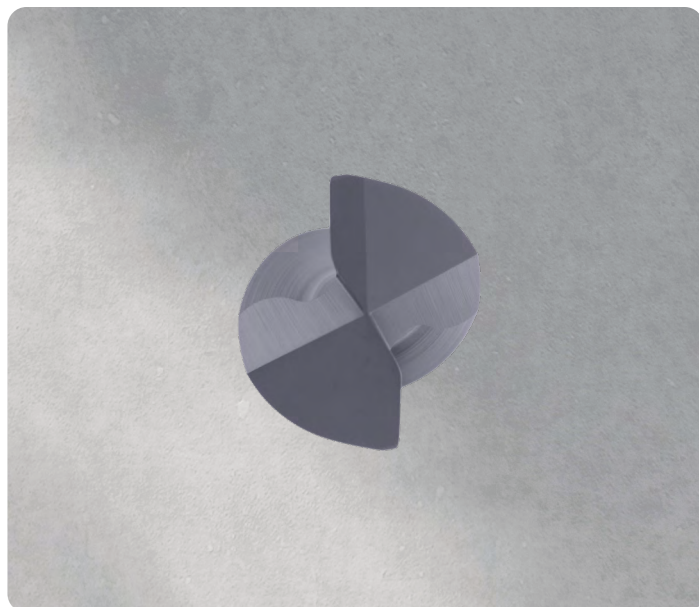

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-

5xD

TiAlN




m7



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC205D124030S	BLDE205D124030S	12,4	14	77	-	-	124	-	2
BLDC205D125030S	BLDE205D125030S	12,5	14	77	-	-	124	-	2
BLDC205D126030S	BLDE205D126030S	12,6	14	77	-	-	124	-	2
BLDC205D127030S	BLDE205D127030S	12,7	14	77	-	-	124	-	2
BLDC205D128030S	BLDE205D128030S	12,8	14	77	-	-	124	-	2
BLDC205D129030S	BLDE205D129030S	12,9	14	77	-	-	124	-	2
BLDC205D130030S	BLDE205D130030S	13,0	14	77	-	-	124	-	2
BLDC205D131030S	BLDE205D131030S	13,1	14	77	-	-	124	-	2
BLDC205D132030S	BLDE205D132030S	13,2	14	77	-	-	124	-	2
BLDC205D133030S	BLDE205D133030S	13,3	14	77	-	-	124	-	2
BLDC205D134030S	BLDE205D134030S	13,4	14	77	-	-	124	-	2
BLDC205D135030S	BLDE205D135030S	13,5	14	77	-	-	124	-	2
BLDC205D136030S	BLDE205D136030S	13,6	14	77	-	-	124	-	2
BLDC205D137030S	BLDE205D137030S	13,7	14	77	-	-	124	-	2
BLDC205D138030S	BLDE205D138030S	13,8	14	77	-	-	124	-	2
BLDC205D139030S	BLDE205D139030S	13,9	14	77	-	-	124	-	2
BLDC205D140030S	BLDE205D140030S	14,0	14	77	-	-	124	-	2
BLDC205D141030S	BLDE205D141030S	14,1	16	83	-	-	133	-	2
BLDC205D142030S	BLDE205D142030S	14,2	16	83	-	-	133	-	2
BLDC205D143030S	BLDE205D143030S	14,3	16	83	-	-	133	-	2
BLDC205D144030S	BLDE205D144030S	14,4	16	83	-	-	133	-	2
BLDC205D145030S	BLDE205D145030S	14,5	16	83	-	-	133	-	2
BLDC205D146030S	BLDE205D146030S	14,6	16	83	-	-	133	-	2
BLDC205D147030S	BLDE205D147030S	14,7	16	83	-	-	133	-	2
BLDC205D148030S	BLDE205D148030S	14,8	16	83	-	-	133	-	2
BLDC205D149030S	BLDE205D149030S	14,9	16	83	-	-	133	-	2
BLDC205D150030S	BLDE205D150030S	15,0	16	83	-	-	133	-	2
BLDC205D151030S	BLDE205D151030S	15,1	16	83	-	-	133	-	2
BLDC205D152030S	BLDE205D152030S	15,2	16	83	-	-	133	-	2
BLDC205D153030S	BLDE205D153030S	15,3	16	83	-	-	133	-	2
BLDC205D154030S	BLDE205D154030S	15,4	16	83	-	-	133	-	2
BLDC205D155030S	BLDE205D155030S	15,5	16	83	-	-	133	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

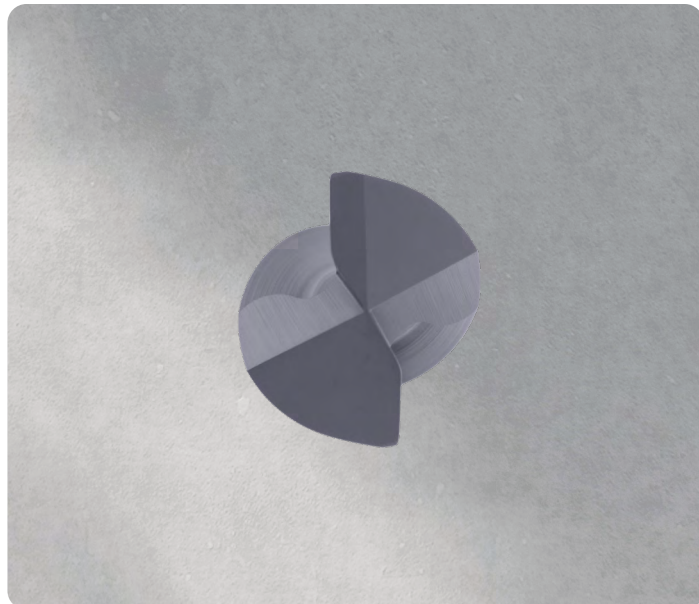

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-

5xD

TiAlN




m7



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC205D156030S	BLDE205D156030S	15,6	16	83	-	-	133	-	2
BLDC205D157030S	BLDE205D157030S	15,7	16	83	-	-	133	-	2
BLDC205D158030S	BLDE205D158030S	15,8	16	83	-	-	133	-	2
BLDC205D159030S	BLDE205D159030S	15,9	16	83	-	-	133	-	2
BLDC205D160030S	BLDE205D160030S	16,0	16	83	-	-	133	-	2
BLDC205D165030S	BLDE205D165030S	16,5	18	93	-	-	143	-	2
BLDC205D167030S	BLDE205D167030S	16,7	18	93	-	-	143	-	2
BLDC205D169030S	BLDE205D169030S	16,9	18	93	-	-	143	-	2
BLDC205D170030S	BLDE205D170030S	17,0	18	93	-	-	143	-	2
BLDC205D175030S	BLDE205D175030S	17,5	18	93	-	-	143	-	2
BLDC205D177030S	BLDE205D177030S	17,7	18	93	-	-	143	-	2
BLDC205D179030S	BLDE205D179030S	17,9	18	93	-	-	143	-	2
BLDC205D180030S	BLDE205D180030S	18,0	18	93	-	-	143	-	2
BLDC205D185030S	BLDE205D185030S	18,5	20	101	-	-	153	-	2
BLDC205D187030S	BLDE205D187030S	18,7	20	101	-	-	153	-	2
BLDC205D189030S	BLDE205D189030S	18,9	20	101	-	-	153	-	2
BLDC205D190030S	BLDE205D190030S	19,0	20	101	-	-	153	-	2
BLDC205D195030S	BLDE205D195030S	19,5	20	101	-	-	153	-	2
BLDC205D197030S	BLDE205D197030S	19,7	20	101	-	-	153	-	2
BLDC205D199030S	BLDE205D199030S	19,9	20	101	-	-	153	-	2
BLDC205D200030S	BLDE205D200030S	20,0	20	101	-	-	153	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

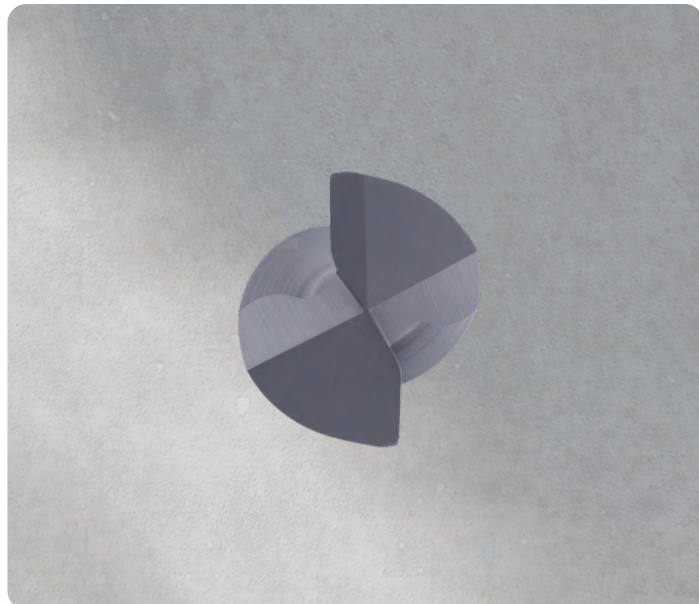

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-