

8xD

TiAlN




m7



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC208D030030SIK	BLDE208D030030SIK	3,0	6	30	-	-	70	-	2
BLDC208D031030SIK	BLDE208D031030SIK	3,1	6	30	-	-	70	-	2
BLDC208D032030SIK	BLDE208D032030SIK	3,2	6	30	-	-	70	-	2
BLDC208D033030SIK	BLDE208D033030SIK	3,3	6	30	-	-	70	-	2
BLDC208D034030SIK	BLDE208D034030SIK	3,4	6	35	-	-	75	-	2
BLDC208D035030SIK	BLDE208D035030SIK	3,5	6	35	-	-	75	-	2
BLDC208D036030SIK	BLDE208D036030SIK	3,6	6	35	-	-	75	-	2
BLDC208D037030SIK	BLDE208D037030SIK	3,7	6	35	-	-	75	-	2
BLDC208D038030SIK	BLDE208D038030SIK	3,8	6	37	-	-	75	-	2
BLDC208D039030SIK	BLDE208D039030SIK	3,9	6	37	-	-	75	-	2
BLDC208D040030SIK	BLDE208D040030SIK	4,0	6	37	-	-	75	-	2
BLDC208D041030SIK	BLDE208D041030SIK	4,1	6	37	-	-	75	-	2
BLDC208D042030SIK	BLDE208D042030SIK	4,2	6	37	-	-	75	-	2
BLDC208D043030SIK	BLDE208D043030SIK	4,3	6	45	-	-	85	-	2
BLDC208D044030SIK	BLDE208D044030SIK	4,4	6	45	-	-	85	-	2
BLDC208D045030SIK	BLDE208D045030SIK	4,5	6	45	-	-	85	-	2
BLDC208D046030SIK	BLDE208D046030SIK	4,6	6	45	-	-	85	-	2
BLDC208D047030SIK	BLDE208D047030SIK	4,7	6	45	-	-	85	-	2
BLDC208D048030SIK	BLDE208D048030SIK	4,8	6	50	-	-	90	-	2
BLDC208D049030SIK	BLDE208D049030SIK	4,9	6	50	-	-	90	-	2
BLDC208D050030SIK	BLDE208D050030SIK	5,0	6	50	-	-	90	-	2
BLDC208D051030SIK	BLDE208D051030SIK	5,1	6	50	-	-	90	-	2
BLDC208D052030SIK	BLDE208D052030SIK	5,2	6	50	-	-	90	-	2
BLDC208D053030SIK	BLDE208D053030SIK	5,3	6	50	-	-	90	-	2
BLDC208D054030SIK	BLDE208D054030SIK	5,4	6	57	-	-	97	-	2
BLDC208D055030SIK	BLDE208D055030SIK	5,5	6	57	-	-	97	-	2
BLDC208D056030SIK	BLDE208D056030SIK	5,6	6	57	-	-	97	-	2
BLDC208D057030SIK	BLDE208D057030SIK	5,7	6	57	-	-	97	-	2
BLDC208D058030SIK	BLDE208D058030SIK	5,8	6	57	-	-	97	-	2
BLDC208D059030SIK	BLDE208D059030SIK	5,9	6	57	-	-	97	-	2
BLDC208D060030SIK	BLDE208D060030SIK	6,0	6	57	-	-	97	-	2
BLDC208D061030SIK	BLDE208D061030SIK	6,1	8	66	-	-	106	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

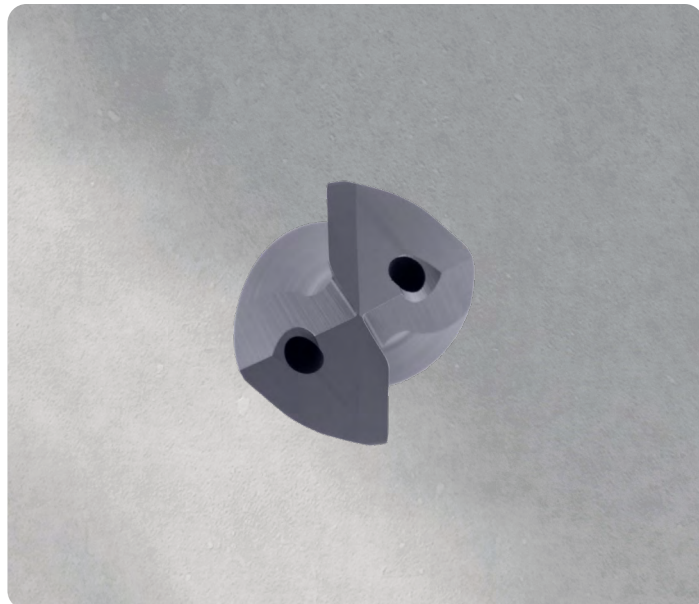

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-

8xD

TiAlN




m7



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC208D062030SIK	BLDE208D062030SIK	6,2	8	66	-	-	106	-	2
BLDC208D063030SIK	BLDE208D063030SIK	6,3	8	66	-	-	106	-	2
BLDC208D064030SIK	BLDE208D064030SIK	6,4	8	66	-	-	106	-	2
BLDC208D065030SIK	BLDE208D065030SIK	6,5	8	66	-	-	106	-	2
BLDC208D066030SIK	BLDE208D066030SIK	6,6	8	66	-	-	106	-	2
BLDC208D067030SIK	BLDE208D067030SIK	6,7	8	66	-	-	106	-	2
BLDC208D068030SIK	BLDE208D068030SIK	6,8	8	66	-	-	106	-	2
BLDC208D069030SIK	BLDE208D069030SIK	6,9	8	76	-	-	116	-	2
BLDC208D070030SIK	BLDE208D070030SIK	7,0	8	76	-	-	116	-	2
BLDC208D071030SIK	BLDE208D071030SIK	7,1	8	76	-	-	116	-	2
BLDC208D072030SIK	BLDE208D072030SIK	7,2	8	76	-	-	116	-	2
BLDC208D073030SIK	BLDE208D073030SIK	7,3	8	76	-	-	116	-	2
BLDC208D074030SIK	BLDE208D074030SIK	7,4	8	76	-	-	116	-	2
BLDC208D075030SIK	BLDE208D075030SIK	7,5	8	76	-	-	116	-	2
BLDC208D076030SIK	BLDE208D076030SIK	7,6	8	76	-	-	116	-	2
BLDC208D077030SIK	BLDE208D077030SIK	7,7	8	76	-	-	116	-	2
BLDC208D078030SIK	BLDE208D078030SIK	7,8	8	76	-	-	116	-	2
BLDC208D079030SIK	BLDE208D079030SIK	7,9	8	76	-	-	116	-	2
BLDC208D080030SIK	BLDE208D080030SIK	8,0	8	76	-	-	116	-	2
BLDC208D081030SIK	BLDE208D081030SIK	8,1	10	87	-	-	131	-	2
BLDC208D082030SIK	BLDE208D082030SIK	8,2	10	87	-	-	131	-	2
BLDC208D083030SIK	BLDE208D083030SIK	8,3	10	87	-	-	131	-	2
BLDC208D084030SIK	BLDE208D084030SIK	8,4	10	87	-	-	131	-	2
BLDC208D085030SIK	BLDE208D085030SIK	8,5	10	87	-	-	131	-	2
BLDC208D086030SIK	BLDE208D086030SIK	8,6	10	87	-	-	131	-	2
BLDC208D087030SIK	BLDE208D087030SIK	8,7	10	87	-	-	131	-	2
BLDC208D088030SIK	BLDE208D088030SIK	8,8	10	87	-	-	131	-	2
BLDC208D089030SIK	BLDE208D089030SIK	8,9	10	87	-	-	131	-	2
BLDC208D090030SIK	BLDE208D090030SIK	9,0	10	87	-	-	131	-	2
BLDC208D091030SIK	BLDE208D091030SIK	9,1	10	95	-	-	139	-	2
BLDC208D092030SIK	BLDE208D092030SIK	9,2	10	95	-	-	139	-	2
BLDC208D093030SIK	BLDE208D093030SIK	9,3	10	95	-	-	139	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

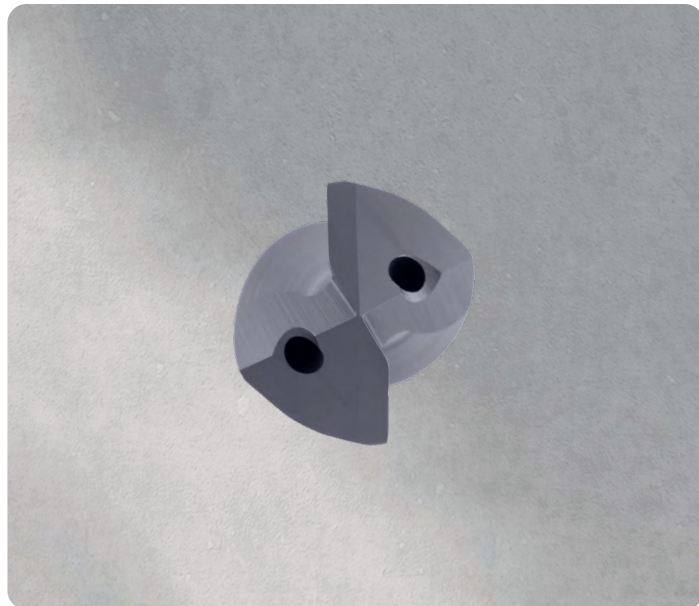


 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC208D094030SIK	BLDE208D094030SIK	9,4	10	95	-	-	139	-	2
BLDC208D095030SIK	BLDE208D095030SIK	9,5	10	95	-	-	139	-	2
BLDC208D096030SIK	BLDE208D096030SIK	9,6	10	95	-	-	139	-	2
BLDC208D097030SIK	BLDE208D097030SIK	9,7	10	95	-	-	139	-	2
BLDC208D098030SIK	BLDE208D098030SIK	9,8	10	95	-	-	139	-	2
BLDC208D099030SIK	BLDE208D099030SIK	9,9	10	95	-	-	139	-	2
BLDC208D100030SIK	BLDE208D100030SIK	10,0	10	95	-	-	139	-	2
BLDC208D101030SIK	BLDE208D101030SIK	10,1	12	106	-	-	155	-	2
BLDC208D102030SIK	BLDE208D102030SIK	10,2	12	106	-	-	155	-	2
BLDC208D103030SIK	BLDE208D103030SIK	10,3	12	106	-	-	155	-	2
BLDC208D104030SIK	BLDE208D104030SIK	10,4	12	106	-	-	155	-	2
BLDC208D105030SIK	BLDE208D105030SIK	10,5	12	106	-	-	155	-	2
BLDC208D106030SIK	BLDE208D106030SIK	10,6	12	106	-	-	155	-	2
BLDC208D107030SIK	BLDE208D107030SIK	10,7	12	106	-	-	155	-	2
BLDC208D108030SIK	BLDE208D108030SIK	10,8	12	106	-	-	155	-	2
BLDC208D109030SIK	BLDE208D109030SIK	10,9	12	106	-	-	155	-	2
BLDC208D110030SIK	BLDE208D110030SIK	11,0	12	106	-	-	155	-	2
BLDC208D111030SIK	BLDE208D111030SIK	11,1	12	114	-	-	163	-	2
BLDC208D112030SIK	BLDE208D112030SIK	11,2	12	114	-	-	163	-	2
BLDC208D113030SIK	BLDE208D113030SIK	11,3	12	114	-	-	163	-	2
BLDC208D114030SIK	BLDE208D114030SIK	11,4	12	114	-	-	163	-	2
BLDC208D115030SIK	BLDE208D115030SIK	11,5	12	114	-	-	163	-	2
BLDC208D116030SIK	BLDE208D116030SIK	11,6	12	114	-	-	163	-	2
BLDC208D117030SIK	BLDE208D117030SIK	11,7	12	114	-	-	163	-	2
BLDC208D118030SIK	BLDE208D118030SIK	11,8	12	114	-	-	163	-	2
BLDC208D119030SIK	BLDE208D119030SIK	11,9	12	114	-	-	163	-	2
BLDC208D120030SIK	BLDE208D120030SIK	12,0	12	114	-	-	163	-	2
BLDC208D121030SIK	BLDE208D121030SIK	12,1	14	133	-	-	182	-	2
BLDC208D122030SIK	BLDE208D122030SIK	12,2	14	133	-	-	182	-	2
BLDC208D123030SIK	BLDE208D123030SIK	12,3	14	133	-	-	182	-	2
BLDC208D125030SIK	BLDE208D125030SIK	12,5	14	133	-	-	182	-	2
BLDC208D127030SIK	BLDE208D127030SIK	12,7	14	133	-	-	182	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

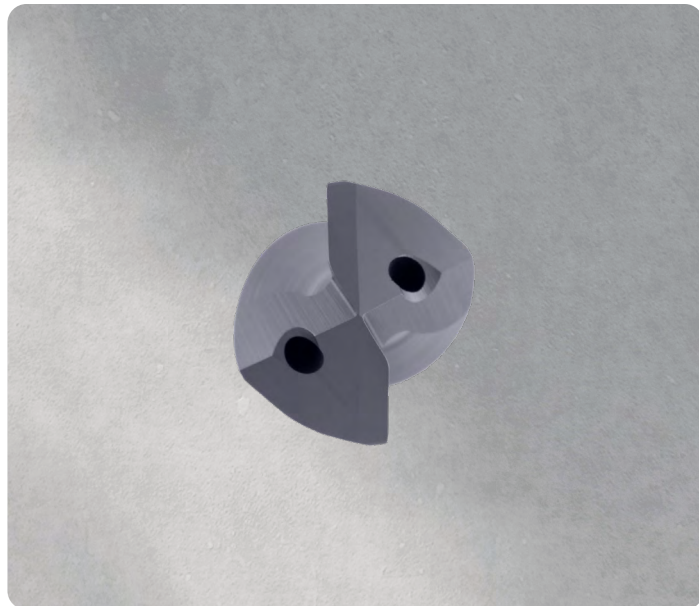

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-

8xD

TiAlN




m7



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
BLDC208D130030SIK	BLDE208D130030SIK	13,0	14	133	-	-	182	-	2
BLDC208D131030SIK	BLDE208D131030SIK	13,1	14	133	-	-	182	-	2
BLDC208D135030SIK	BLDE208D135030SIK	13,5	14	133	-	-	182	-	2
BLDC208D140030SIK	BLDE208D140030SIK	14,0	14	133	-	-	182	-	2
BLDC208D141030SIK	BLDE208D141030SIK	14,1	16	152	-	-	204	-	2
BLDC208D142030SIK	BLDE208D142030SIK	14,2	16	152	-	-	204	-	2
BLDC208D145030SIK	BLDE208D145030SIK	14,5	16	152	-	-	204	-	2
BLDC208D150030SIK	BLDE208D150030SIK	15,0	16	152	-	-	204	-	2
BLDC208D151030SIK	BLDE208D151030SIK	15,1	16	152	-	-	204	-	2
BLDC208D155030SIK	BLDE208D155030SIK	15,5	16	152	-	-	204	-	2
BLDC208D160030SIK	BLDE208D160030SIK	16,0	16	152	-	-	204	-	2
BLDC208D165030SIK	BLDE208D165030SIK	16,5	18	171	-	-	223	-	2
BLDC208D169030SIK	BLDE208D169030SIK	16,9	18	171	-	-	223	-	2
BLDC208D170030SIK	BLDE208D170030SIK	17,0	18	171	-	-	223	-	2
BLDC208D175030SIK	BLDE208D175030SIK	17,5	18	171	-	-	223	-	2
BLDC208D180030SIK	BLDE208D180030SIK	18,0	18	171	-	-	223	-	2
BLDC208D185030SIK	BLDE208D185030SIK	18,5	20	190	-	-	244	-	2
BLDC208D189030SIK	BLDE208D189030SIK	18,9	20	190	-	-	244	-	2
BLDC208D190030SIK	BLDE208D190030SIK	19,0	20	190	-	-	244	-	2
BLDC208D195030SIK	BLDE208D195030SIK	19,5	20	190	-	-	244	-	2
BLDC208D200030SIK	BLDE208D200030SIK	20,0	20	190	-	-	244	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	140	120	90	-	-	-	200	160	50	50	-	40	-	-	-

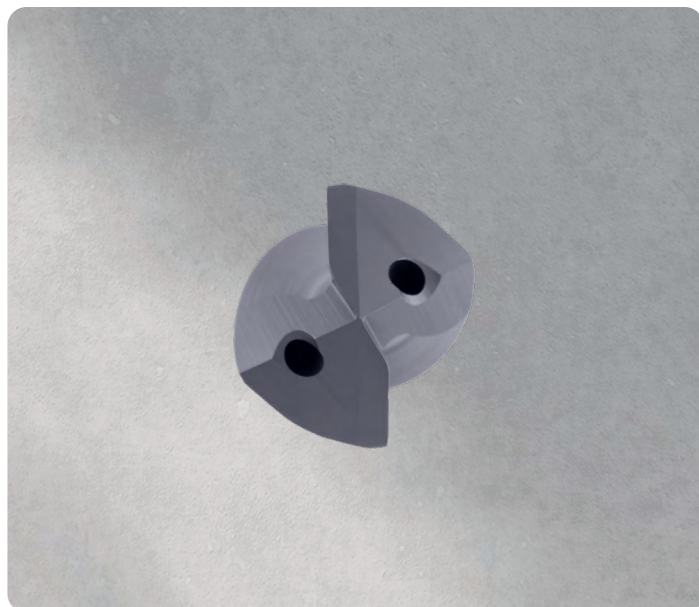

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,1-2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø2,6-3	0,125	0,100	0,080	-	-	-	0,160	0,160	0,063	0,050	-	0,050	-	-	-
Ø3,1-4	0,160	0,125	0,100	-	-	-	0,200	0,200	0,080	0,063	-	0,063	-	-	-
Ø4,1-5	0,160	0,125	0,100	-	-	-	0,250	0,200	0,080	0,063	-	0,063	-	-	-
Ø5,1-6	0,200	0,160	0,125	-	-	-	0,315	0,250	0,100	0,080	-	0,080	-	-	-
Ø6,1-8	0,250	0,200	0,160	-	-	-	0,315	0,315	0,125	0,100	-	0,100	-	-	-
Ø8,1-10	0,315	0,250	0,200	-	-	-	0,400	0,400	0,160	0,125	-	0,125	-	-	-
Ø10,1-12	0,315	0,250	0,200	-	-	-	0,500	0,400	0,160	0,125	-	0,125	-	-	-
Ø12,1-16	0,400	0,315	0,250	-	-	-	0,630	0,500	0,200	0,160	-	0,160	-	-	-
Ø16,1-20	0,500	0,400	0,315	-	-	-	0,630	0,630	0,250	0,200	-	0,200	-	-	-