







## HSS Spiral Flute Machine Tap, BSW, ISO Standard

Machine tap with spiral flute suited for blind holes. Available with bright finish to produce more accurate and cleaner threads, preventing the workpiece material from sticking to the cutting edges or BLUE finish with steam tempered surface, which acts to retain cutting fluid and prevent chip to tool welding.



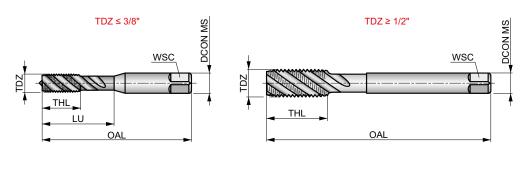

Workpiece material group suitability and starting values for cutting speed (m/min).

									9					,
<b>P1.1</b>	<b>P1.2</b>	<b>P1.3</b>	<b>P2.1</b>	<b>P2.2</b>	<b>P2.3</b>	P3.1	P3.2	P3.3	P4.1	P4.2	M1.1	M1.2	M2.1	
<b>1</b> 0	<b>1</b> 1	<b>1</b> 3	■8	<b>1</b> 7	<b>6</b>	<b>1</b> 7	<b>5</b>	<b>4</b>	<b>4</b>	<b></b> 3	<b>6</b>	<b> ■</b> 5	<b>∠</b> 4	
<b>M2.2</b>	<b>M2.3</b>	M3.1	<b>M3.2</b>	M3.3	M4.1	<b>N1.3</b>	<b>N2.1</b>	<b>N2.2</b>	<b>N2.3</b>					
<b>■</b> 5	<b></b> 5	<b>5</b>	<b>4</b>	<b>2</b> 3	<b>2</b> 2	<b>Z</b> 5	<b>1</b> 2	<b>1</b> 0	<b></b> 8 <b></b>					
Product		TDZ	TPI	TD		OAL	THL	DCON MS	WSC	NC	)F	PHD	LU	
				[mm]		[mm]	[mm]	[mm]	[mm]			[mm]	[mm]	
E5331/8 1)		1/8	40	3.175	5	48.0	12.5	3.15	2.50	3		2.55	12.50	
E5221/QRIII	IF	1/0	40	2 174	5	48 U	12.5	2 15	2.50	2		2.55	12.50	

			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]
E5331/8 1)	1/8	40	3.175	48.0	12.5	3.15	2.50	3	2.55	12.50
E5331/8BLUE	1/8	40	3.175	48.0	12.5	3.15	2.50	3	2.55	12.50
E5333/16 1)	3/16	24	4.763	58.0	11	5.00	4.00	3	3.70	20.00
E5333/16BLUE	3/16	24	4.763	58.0	11	5.00	4.00	3	3.70	20.00
E5331/4 1)	1/4	20	6.350	66.0	13	6.30	5.00	3	5.10	26.00
E5331/4BLUE	1/4	20	6.350	66.0	13	6.30	5.00	3	5.10	26.00
E5335/16 1)	5/16	18	7.938	72.0	16	8.00	6.30	3	6.50	31.00
E5335/16BLUE	5/16	18	7.938	72.0	16	8.00	6.30	3	6.50	31.00
E5333/8 1)	3/8	16	9.525	80.0	18	10.00	8.00	3	7.90	34.00
E5333/8BLUE	3/8	16	9.525	80.0	18	10.00	8.00	3	7.90	34.00
E5331/2 1)	1/2	12	12.700	89.0	22	9.00	7.10	3	10.50	-
E5331/2BLUE	1/2	12	12.700	89.0	22	9.00	7.10	3	10.50	-
E5335/8 1)	5/8	11	15.875	102.0	24	12.50	10.00	3	13.50	-
E5335/8BLUE	5/8	11	15.875	102.0	24	12.50	10.00	3	13.50	-
E5333/4 1)	3/4	10	19.050	112.0	29	14.00	11.20	3	16.50	-
E5333/4BLUE	3/4	10	19.050	112.0	29	14.00	11.20	3	16.50	-

<sup>1)</sup> Bright Finish.

## WMG (WORK MATERIAL GROUP)

SO gr	oup	WMC	G (Work Material Group)		Hardness (HB or HRC)	Ultimate Tensile Streng (MPa)
		P1.1		Sulfurized	< 240 HB	≤ 830
	P1	P1.2	Free machining steel	Sulfurized and phosphorized	< 180 HB	≤ 620
		P1.3	(carbon steels with increased machinability)	Sulfurized/phosphorized and leaded	< 180 HB	≤ 620
		P2.1		Containing < 0.25 % C	< 180 HB	≤ 620
	กา		Plain carbon steel	-		
	P2	P2.2	(steels comprised of mainly iron and carbon)	Containing < 0.55 % C	< 240 HB	≤830
		P2.3		Containing >0.55 % C	< 300 HB	≤ 1030
<b>P</b>		P3.1	Allendad	Annealed	< 180 HB	≤ 620
	P3	P3.2	Alloy steel	Harland Landson and	180 - 260 HB	> 620 ≤ 900
		P3.3	(carbon steels with an alloying content $\leq$ 10%)	Hardened and tempered	260 - 360 HB	> 900 ≤ 1240
		P4.1		Annealed	< 26 HRC	≤ 900
	P4	P4.2	Tool steel	rimedicu	26 – 39 HRC	> 900 ≤ 1240
	r4		(special alloy steel for tools, dies and molds)	Hardened and tempered		+
		P4.3			39 – 45 HRC	> 1240 ≤ 145
	M1	M1.1	Ferritic stainless steel		< 160 HB	≤ 520
		M1.2	(straight chromium non-hardenable alloys)		160 – 220 HB	> 520 ≤ 700
		M2.1	Mantanatitantainlassatanl	Annealed	< 200 HB	≤ 670
	M2	M2.2	Martensitic stainless steel	Quenched and tempered	200 - 280 HB	> 670 ≤ 950
		M2.3	(straight chromium hardenable alloys)	Precipitation-hardened	280 - 380 HB	> 950 ≤ 1300
		M3.1		< 200 HB	≤ 750	
Λ	М3	M3.2	Austenitic stainless steel	200 – 260 HB	> 750 ≤ 870	
•	INIO		(chromium-nickel and chromium-nickel-manganese alloys)			
		M3.3			260 – 300 HB	> 870 ≤ 104
	M4	M4.1	Austenitic-ferritic (DUPLEX) or super-austenitic stainless steel		< 300 HB	≤ 990
	1414	M4.2	Precipitation hardening austenitic stainless steel		300 – 380 HB	≤ 1320
		K1.1		Ferritic or ferritic-pearlitic	< 180 HB	≤ 190
	V1		Gray iron or Automotive Gray iron (GG)	•		
	K1	K1.2	(iron-carbon castings with a lamellar graphite microstructure)	Ferritic-pearlictic or pearlitic	180 – 240 HB	> 190 ≤ 310
		K1.3	• • • • • • • • • • • • • • • • • • • •	Pearlitic	240 – 280 HB	> 310 ≤ 390
		K2.1	Malleable iron (GTS/GTW)	Ferritic	< 160 HB	≤ 400
	K2	K2.2	(iron-carbon castings with a graphite-free microstructure)	Ferritic or pearlitic	160 - 200 HB	> 400 ≤ 550
		K2.3	(non-carbon castings with a graphite-free inicrostructure)	Pearlitic	200 - 240 HB	> 550 ≤ 660
		K3.1		Ferritic	< 180 HB	≤ 560
	К3	K3.2	Ductile iron (GGG)	Ferritic or pearlitic	180 – 220 HB	> 560 ≤ 680
	KS		(iron-carbon castings with a nodular graphite microstructure)			
		K3.3		Pearlitic	220 – 260 HB	> 680 ≤ 800
		K4.1	Austenitic gray iron (ASTM A436) (iron-carbon alloy castings with an austenitic lamellar graphite microstructure)		< 180 HB	≤ 190
K4	<b>K</b> 4	K4.2	Austenitic ductile iron (ASTM A439 or ASTM A571) (iron-carbon alloy castings with an austenitic nodular graphite microstructure)		< 240 HB	≤ 740
		K4.3		< 280 HB	> 840 ≤ 980	
		K4.4	Austempered ductile iron (ASTM A897)	280 - 320 HB	> 980 ≤ 1130	
		K4.5	(iron-carbon alloy castings with an ausferrite microstructure)		320 – 360 HB	> 1130 ≤ 128
				Ferritic	< 180 HB	
K	W.F	K5.1	Compacted graphite iron CGI (ASTM A842)			≤ 400
	K5	K5.2	(iron-carbon castings with a vermicular graphite structure)	Ferritic-pearlitic	180 – 220 HB	> 400 ≤ 450
		K5.3		Pearlitic	220 – 260 HB	> 450 ≤ 500
		N1.1	Commercially pure wrought aluminium		< 60 HB	≤ 240
	N1	N1.2	Wassaka kanalaisaa allasa	Half hard tempered	60 - 100 HB	> 240 ≤ 400
		N1.3	Wrought aluminium alloys	Full hard tempered	100 – 150 HB	> 400 ≤ 590
		N2.1		,	< 75 HB	≤ 240
ļ	N2		Cast aluminium alloys		75 – 90 HB	> 240 ≤ 270
	IVZ	N2.2	Cust araminium anoys			
		N2.3			90 – 140 HB	> 270 ≤ 440
N3		N3.1	Free-cutting copper-alloys materials with excellent machining properties	-	-	
	N3	N3.2	Short-chip copper-alloys with good to moderate machining properties		-	-
		N3.3	Electrolytic copper and long-chip copper-alloys with moderate to poor machining properti	-	-	
		N4.1	Thermoplastic polymers		_	-
	N4		Thermosetting polymers		_	_
		N4.3			_	_
	NE					_
	N5	N5.1	Graphite			
		S1.1			< 200 HB	≤ 660
	<b>S1</b>	S1.2	Titanium or titanium alloys		200 – 280 HB	> 660 ≤ 950
S2	S1.3			280 – 360 HB	> 950 ≤ 120	
	S2.1	Fe hand bish town and mareller		< 200 HB	≤ 690	
	52	S2.2	Fe-based high-temperature alloys		200 – 280 HB	> 690 ≤ 970
<b>S</b> 3		S3.1			< 280 HB	≤ 940
		\$3.2	Ni-based high-temperature alloys		280 – 360 HB	
						> 940 ≤ 120
	<b>S4</b>	S4.1	Co-based high-temperature alloys		< 240 HB	≤ 800
		S4.2	· · · · ·		240 – 320 HB	> 800 ≤ 107
	H1	H1.1	Chilled cast iron		< 440 HB	_
		H2.1	Unidened section		< 55 HRC	_
			Hardened cast iron		> 55 HRC	_
	H2					
	H2	H2.2				_
ı		H2.2 H3.1	Hardened steel < 55 HRC		< 51 HRC	
ı	H2	H2.2	Hardened steel <55 HRC			-