




DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
FLDC2L020030S	-	2,0	2,0	24	-	-	49	-	2
FLDC2L021030S	-	2,1	2,1	24	-	-	49	-	2
FLDC2L022030S	-	2,2	2,2	27	-	-	53	-	2
FLDC2L023030S	-	2,3	2,3	27	-	-	53	-	2
FLDC2L024030S	-	2,4	2,4	30	-	-	57	-	2
FLDC2L025030S	-	2,5	2,5	30	-	-	57	-	2
FLDC2L026030S	-	2,6	2,6	30	-	-	57	-	2
FLDC2L027030S	-	2,7	2,7	33	-	-	61	-	2
FLDC2L028030S	-	2,8	2,8	33	-	-	61	-	2
FLDC2L029030S	-	2,9	2,9	33	-	-	61	-	2
FLDC2L030030S	-	3,0	3,0	33	-	-	61	-	2
FLDC2L031030S	-	3,1	3,1	36	-	-	65	-	2
FLDC2L032030S	-	3,2	3,2	36	-	-	65	-	2
FLDC2L033030S	-	3,3	3,3	36	-	-	65	-	2
FLDC2L034030S	-	3,4	3,4	39	-	-	70	-	2
FLDC2L035030S	-	3,5	3,5	39	-	-	70	-	2
FLDC2L036030S	-	3,6	3,6	39	-	-	70	-	2
FLDC2L037030S	-	3,7	3,7	39	-	-	70	-	2
FLDC2L038030S	-	3,8	3,8	43	-	-	75	-	2
FLDC2L039030S	-	3,9	3,9	43	-	-	75	-	2
FLDC2L040030S	-	4,0	4,0	43	-	-	75	-	2
FLDC2L041030S	-	4,1	4,1	43	-	-	75	-	2
FLDC2L042030S	-	4,2	4,2	43	-	-	75	-	2
FLDC2L043030S	-	4,3	4,3	47	-	-	80	-	2
FLDC2L044030S	-	4,4	4,4	47	-	-	80	-	2
FLDC2L045030S	-	4,5	4,5	47	-	-	80	-	2
FLDC2L046030S	-	4,6	4,6	47	-	-	80	-	2
FLDC2L047030S	-	4,7	4,7	47	-	-	80	-	2
FLDC2L048030S	-	4,8	4,8	52	-	-	86	-	2
FLDC2L049030S	-	4,9	4,9	52	-	-	86	-	2
FLDC2L050030S	-	5,0	5,0	52	-	-	86	-	2
FLDC2L055030S	-	5,5	5,5	57	-	-	93	-	2

	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Vc	80	70	-	-	-	-	90	70	-	-	-	-	200	160	-

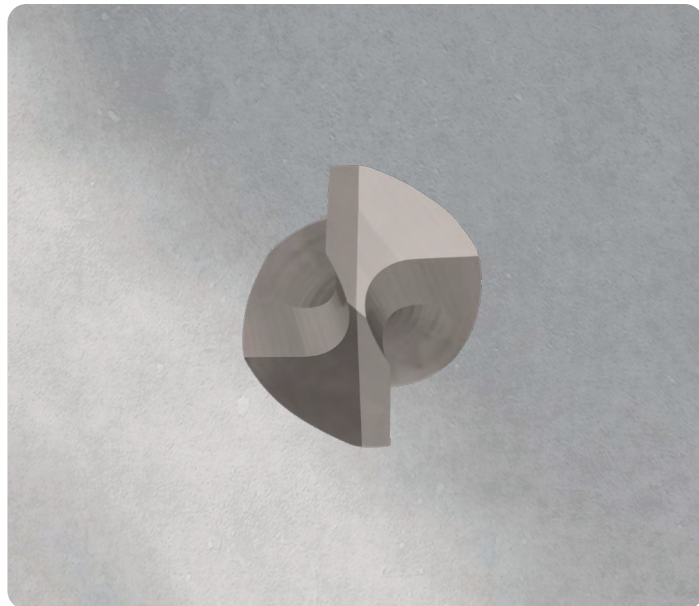


 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	0,080	0,063	-	-	-	-	0,125	0,100	-	-	-	-	0,125	0,100	-
Ø2,1-2,5	0,100	0,080	-	-	-	-	0,160	0,125	-	-	-	-	0,160	0,125	-
Ø2,6-3	0,125	0,100	-	-	-	-	0,160	0,160	-	-	-	-	0,160	0,160	-
Ø3,1-4	0,160	0,125	-	-	-	-	0,200	0,200	-	-	-	-	0,200	0,200	-
Ø4,1-5	0,160	0,125	-	-	-	-	0,250	0,200	-	-	-	-	0,250	0,200	-
Ø5,1-6	0,200	0,160	-	-	-	-	0,315	0,250	-	-	-	-	0,315	0,250	-
Ø6,1-8	0,250	0,200	-	-	-	-	0,315	0,315	-	-	-	-	0,315	0,315	-
Ø8,1-10	0,315	0,250	-	-	-	-	0,400	0,400	-	-	-	-	0,400	0,400	-
Ø10,1-12	0,315	0,250	-	-	-	-	0,500	0,400	-	-	-	-	0,500	0,400	-
Ø12,1-16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø16,1-20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



DIN 6535 HA	DIN 6535 HE	Dc	Ds	Ls	Ln	Dn	Lt	r/c	z
FLDC2L060030S	-	6,0	6,0	57	-	-	93	-	2
FLDC2L065030S	-	6,5	6,5	63	-	-	101	-	2
FLDC2L068030S	-	6,8	6,8	69	-	-	109	-	2
FLDC2L070030S	-	7,0	7,0	69	-	-	109	-	2
FLDC2L075030S	-	7,5	7,5	69	-	-	109	-	2
FLDC2L080030S	-	8,0	8,0	75	-	-	117	-	2
FLDC2L085030S	-	8,5	8,5	75	-	-	117	-	2
FLDC2L090030S	-	9,0	9,0	81	-	-	125	-	2
FLDC2L095030S	-	9,5	9,5	91	-	-	125	-	2
FLDC2L100030S	-	10,0	10,0	87	-	-	133	-	2
FLDC2L102030S	-	10,2	10,2	87	-	-	133	-	2
FLDC2L105030S	-	10,5	10,5	87	-	-	133	-	2
FLDC2L110030S	-	11,0	11,0	94	-	-	142	-	2
FLDC2L115030S	-	11,5	11,5	94	-	-	142	-	2
FLDC2L120030S	-	12,0	12,0	101	-	-	151	-	2

Vc	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
	80	70	-	-	-	-	90	70	-	-	-	-	200	160	-

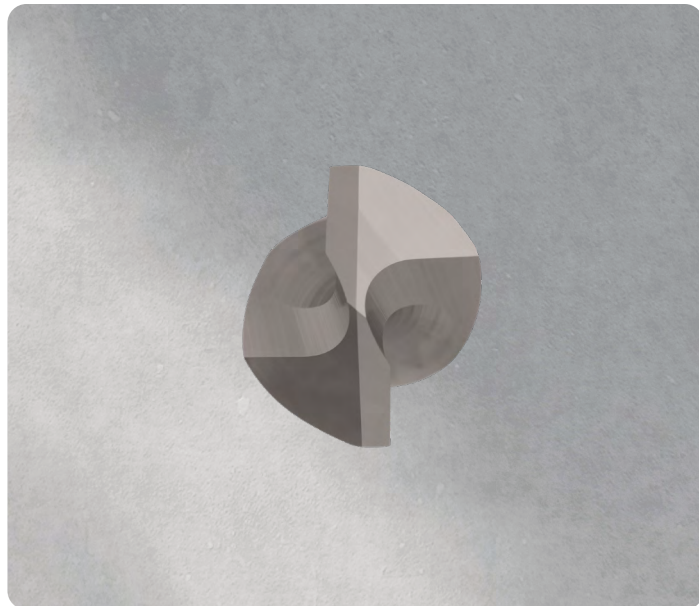

 fn	P1	P2	P3	H1	H2	H3	K1	K2	M1	M2	S1	S2	N1	N2	G
Ø0,1-2	0,080	0,063	-	-	-	-	0,125	0,100	-	-	-	-	0,125	0,100	-
Ø2,1-2,5	0,100	0,080	-	-	-	-	0,160	0,125	-	-	-	-	0,160	0,125	-
Ø2,6-3	0,125	0,100	-	-	-	-	0,160	0,160	-	-	-	-	0,160	0,160	-
Ø3,1-4	0,160	0,125	-	-	-	-	0,200	0,200	-	-	-	-	0,200	0,200	-
Ø4,1-5	0,160	0,125	-	-	-	-	0,250	0,200	-	-	-	-	0,250	0,200	-
Ø5,1-6	0,200	0,160	-	-	-	-	0,315	0,250	-	-	-	-	0,315	0,250	-
Ø6,1-8	0,250	0,200	-	-	-	-	0,315	0,315	-	-	-	-	0,315	0,315	-
Ø8,1-10	0,315	0,250	-	-	-	-	0,400	0,400	-	-	-	-	0,400	0,400	-
Ø10,1-12	0,315	0,250	-	-	-	-	0,500	0,400	-	-	-	-	0,500	0,400	-
Ø12,1-16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ø16,1-20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-