



R467



FORCE M Solid Carbide 3XD Drill with Coolant Feed, TiAlN Coated

High performance drill, able to produce high quality and accurate holes at high speeds and feeds (H9 hole tolerance in stainless steel and heat resistant materials). A 140°, 4-facet split point and CTW flute construction. Coolant holes enhance chip evacuation. TiAlN coating increases surface hardness and improves tool life.

FORCE M

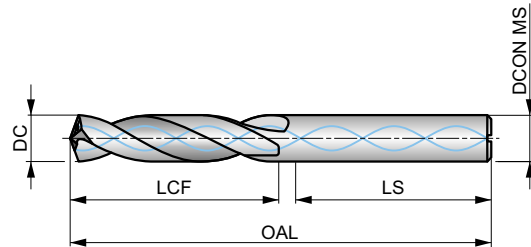

HM	DIN 6537K	3xD
140°	TiAlN	DIN 6535HA
CTW	DC m7	

Workpiece material group suitability, starting values for cutting speed (m/min) and feed Alpha Code. Tables with feed per revolution can be found starting from page 65.

M1.1 ■ 117 G	M1.2 ■ 99 G	M2.1 ■ 104 G	M2.2 ■ 85 G	M2.3 ■ 71 E	M3.1 ■ 87 G	M3.2 ■ 75 G	M3.3 ■ 68 F	M4.1 ■ 60 F	M4.2 ■ 52 E	S1.1 ■ 55 V	S1.2 ■ 45 V	S1.3 ■ 40 U	S2.1 ■ 60 U
S2.2 ■ 56 U	S3.1 ■ 45 U	S3.2 ■ 40 U	S4.1 ■ 35 U	S4.2 ■ 32 U									

DCON MS tolerance h6.

Product	DC [inch]	DC [mm]	DC [inch]	LCF [mm]	OAL [mm]	LS [mm]	DCON MS [mm]
R4673.0	—	3.00	0.1181	20.0	62.0	36.0	6.00
R4673.1	—	3.10	0.1220	20.0	62.0	36.0	6.00
R4671/8	1/8	3.18	0.1250	20.0	62.0	36.0	6.00
R4673.2	—	3.20	0.1260	20.0	62.0	36.0	6.00
R4673.3	—	3.30	0.1299	20.0	62.0	36.0	6.00
R4673.4	—	3.40	0.1339	20.0	62.0	36.0	6.00
R467N29	N29	3.45	0.1360	20.0	62.0	36.0	6.00
R4673.5	—	3.50	0.1378	20.0	62.0	36.0	6.00
R4679/64	9/64	3.57	0.1406	20.0	62.0	36.0	6.00
R4673.6	—	3.60	0.1417	20.0	62.0	36.0	6.00
R4673.7	—	3.70	0.1457	20.0	62.0	36.0	6.00
R4673.8	—	3.80	0.1496	24.0	66.0	36.0	6.00
R4673.9	—	3.90	0.1535	24.0	66.0	36.0	6.00
R4675/32	5/32	3.97	0.1563	24.0	66.0	36.0	6.00
R4674.0	—	4.00	0.1575	24.0	66.0	36.0	6.00
R4674.05	—	4.05	0.1594	24.0	66.0	36.0	6.00
R4674.1	—	4.10	0.1614	24.0	66.0	36.0	6.00
R4674.2	—	4.20	0.1654	24.0	66.0	36.0	6.00
R4674.3	—	4.30	0.1693	24.0	66.0	36.0	6.00
R46711/64	11/64	4.37	0.1719	24.0	66.0	36.0	6.00
R4674.4	—	4.40	0.1732	24.0	66.0	36.0	6.00
R4674.5	—	4.50	0.1772	24.0	66.0	36.0	6.00
R4674.6	—	4.60	0.1811	24.0	66.0	36.0	6.00
R4674.7	—	4.70	0.1850	24.0	66.0	36.0	6.00
R4673/16	3/16	4.76	0.1875	28.0	66.0	36.0	6.00
R4674.8	—	4.80	0.1890	28.0	66.0	36.0	6.00
R4674.9	—	4.90	0.1929	28.0	66.0	36.0	6.00
R4675.0	—	5.00	0.1969	28.0	66.0	36.0	6.00
R4675.05	—	5.05	0.1988	28.0	66.0	36.0	6.00




Product	DC	DC	DC	LCF	OAL	LS	DCON MS
	[inch]	[mm]	[inch]	[mm]	[mm]	[mm]	[mm]
R4675.1	—	5.10	0.2008	28.0	66.0	36.0	6.00
R467N7	N7	5.11	0.2010	28.0	66.0	36.0	6.00
R46713/64	13/64	5.16	0.2031	28.0	66.0	36.0	6.00
R4675.2	—	5.20	0.2047	28.0	66.0	36.0	6.00
R467N5	N5	5.22	0.2055	28.0	66.0	36.0	6.00
R4675.3	—	5.30	0.2087	28.0	66.0	36.0	6.00
R4675.4	—	5.40	0.2126	28.0	66.0	36.0	6.00
R4675.5	—	5.50	0.2165	28.0	66.0	36.0	6.00
R4677/32	7/32	5.56	0.2188	28.0	66.0	36.0	6.00
R4675.6	—	5.60	0.2205	28.0	66.0	36.0	6.00
R4675.7	—	5.70	0.2244	28.0	66.0	36.0	6.00
R4675.8	—	5.80	0.2283	28.0	66.0	36.0	6.00
R4675.9	—	5.90	0.2323	28.0	66.0	36.0	6.00
R46715/64	15/64	5.95	0.2344	28.0	66.0	36.0	6.00
R4676.0	—	6.00	0.2362	28.0	66.0	36.0	6.00
R4676.05	—	6.05	0.2382	34.0	79.0	36.0	8.00
R4676.1	—	6.10	0.2402	34.0	79.0	36.0	8.00
R4676.2	—	6.20	0.2441	34.0	79.0	36.0	8.00
R4676.3	—	6.30	0.2480	34.0	79.0	36.0	8.00
R4671/4	1/4	6.35	0.2500	34.0	79.0	36.0	8.00
R4676.4	—	6.40	0.2520	34.0	79.0	36.0	8.00
R4676.5	—	6.50	0.2559	34.0	79.0	36.0	8.00
R4676.6	—	6.60	0.2598	34.0	79.0	36.0	8.00
R4676.7	—	6.70	0.2638	34.0	79.0	36.0	8.00
R46717/64	17/64	6.75	0.2656	34.0	79.0	36.0	8.00
R4676.8	—	6.80	0.2677	34.0	79.0	36.0	8.00
R4676.9	—	6.90	0.2717	34.0	79.0	36.0	8.00
R4677.0	—	7.00	0.2756	34.0	79.0	36.0	8.00
R4677.1	—	7.10	0.2795	41.0	79.0	36.0	8.00
R4679/32	9/32	7.14	0.2813	41.0	79.0	36.0	8.00
R4677.2	—	7.20	0.2835	41.0	79.0	36.0	8.00
R4677.3	—	7.30	0.2874	41.0	79.0	36.0	8.00
R4677.4	—	7.40	0.2913	41.0	79.0	36.0	8.00
R4677.5	—	7.50	0.2953	41.0	79.0	36.0	8.00
R46719/64	19/64	7.54	0.2969	41.0	79.0	36.0	8.00
R4677.6	—	7.60	0.2992	41.0	79.0	36.0	8.00
R4677.7	—	7.70	0.3031	41.0	79.0	36.0	8.00
R4677.8	—	7.80	0.3071	41.0	79.0	36.0	8.00
R4677.9	—	7.90	0.3110	41.0	79.0	36.0	8.00
R4675/16	5/16	7.94	0.3125	41.0	79.0	36.0	8.00
R4678.0	—	8.00	0.3150	41.0	79.0	36.0	8.00
R4678.05	—	8.05	0.3169	47.0	89.0	40.0	10.00
R4678.1	—	8.10	0.3189	47.0	89.0	40.0	10.00
R4678.2	—	8.20	0.3228	47.0	89.0	40.0	10.00
R4678.3	—	8.30	0.3268	47.0	89.0	40.0	10.00
R46721/64	21/64	8.33	0.3281	47.0	89.0	40.0	10.00
R4678.4	—	8.40	0.3307	47.0	89.0	40.0	10.00
R4678.5	—	8.50	0.3346	47.0	89.0	40.0	10.00
R4678.6	—	8.60	0.3386	47.0	89.0	40.0	10.00
R4678.7	—	8.70	0.3425	47.0	89.0	40.0	10.00
R46711/32	11/32	8.73	0.3438	47.0	89.0	40.0	10.00
R4678.8	—	8.80	0.3465	47.0	89.0	40.0	10.00
R4678.9	—	8.90	0.3504	47.0	89.0	40.0	10.00
R4679.0	—	9.00	0.3543	47.0	89.0	40.0	10.00
R4679.1	—	9.10	0.3583	47.0	89.0	40.0	10.00
R46723/64	23/64	9.13	0.3594	47.0	89.0	40.0	10.00
R4679.2	—	9.20	0.3622	47.0	89.0	40.0	10.00
R4679.3	—	9.30	0.3661	47.0	89.0	40.0	10.00
R4679.4	—	9.40	0.3701	47.0	89.0	40.0	10.00
R4679.5	—	9.50	0.3740	47.0	89.0	40.0	10.00
R4673/8	3/8	9.53	0.3750	47.0	89.0	40.0	10.00
R4679.6	—	9.60	0.3780	47.0	89.0	40.0	10.00



Product	DC	DC	DC	LCF	OAL	LS	DCON MS
	[inch]	[mm]	[inch]	[mm]	[mm]	[mm]	[mm]
R4679.7	—	9.70	0.3819	47.0	89.0	40.0	10.00
R4679.8	—	9.80	0.3858	47.0	89.0	40.0	10.00
R4679.9	—	9.90	0.3898	47.0	89.0	40.0	10.00
R46725/64	25/64	9.92	0.3906	47.0	89.0	40.0	10.00
R46710.0	—	10.00	0.3937	47.0	89.0	40.0	10.00
R46710.05	—	10.05	0.3957	55.0	102.0	45.0	12.00
R46710.1	—	10.10	0.3976	55.0	102.0	45.0	12.00
R46710.2	—	10.20	0.4016	55.0	102.0	45.0	12.00
R46710.3	—	10.30	0.4055	55.0	102.0	45.0	12.00
R46713/32	13/32	10.32	0.4063	55.0	102.0	45.0	12.00
R46710.4	—	10.40	0.4094	55.0	102.0	45.0	12.00
R46710.5	—	10.50	0.4134	55.0	102.0	45.0	12.00
R46710.6	—	10.60	0.4173	55.0	102.0	45.0	12.00
R46727/64	27/64	10.72	0.4219	55.0	102.0	45.0	12.00
R46710.8	—	10.80	0.4252	55.0	102.0	45.0	12.00
R46710.9	—	10.90	0.4291	55.0	102.0	45.0	12.00
R46711.0	—	11.00	0.4331	55.0	102.0	45.0	12.00
R4677/16	7/16	11.11	0.4375	55.0	102.0	45.0	12.00
R46711.2	—	11.20	0.4409	55.0	102.0	45.0	12.00
R46711.3	—	11.30	0.4449	55.0	102.0	45.0	12.00
R46711.4	—	11.40	0.4488	55.0	102.0	45.0	12.00
R46711.5	—	11.50	0.4528	55.0	102.0	45.0	12.00
R46729/64	29/64	11.51	0.4531	55.0	102.0	45.0	12.00
R46711.6	—	11.60	0.4567	55.0	102.0	45.0	12.00
R46711.8	—	11.80	0.4646	55.0	102.0	45.0	12.00
R46715/32	15/32	11.91	0.4688	55.0	102.0	45.0	12.00
R46712.0	—	12.00	0.4724	55.0	102.0	45.0	12.00
R46712.05	—	12.05	0.4744	60.0	107.0	45.0	14.00
R46712.1	—	12.10	0.4764	60.0	107.0	45.0	14.00
R46712.2	—	12.20	0.4803	60.0	107.0	45.0	14.00
R46731/64	31/64	12.30	0.4844	60.0	107.0	45.0	14.00
R46712.5	—	12.50	0.4921	60.0	107.0	45.0	14.00
R46712.7	—	12.70	0.5000	60.0	107.0	45.0	14.00
R4671/2	1/2	12.70	0.5000	60.0	107.0	45.0	14.00
R46712.8	—	12.80	0.5039	60.0	107.0	45.0	14.00
R46713.0	—	13.00	0.5118	60.0	107.0	45.0	14.00
R46733/64	33/64	13.10	0.5156	60.0	107.0	45.0	14.00
R46713.3	—	13.30	0.5236	60.0	107.0	45.0	14.00
R46717/32	17/32	13.49	0.5313	60.0	107.0	45.0	14.00
R46713.5	—	13.50	0.5315	60.0	107.0	45.0	14.00
R46713.8	—	13.80	0.5433	60.0	107.0	45.0	14.00
R46735/64	35/64	13.89	0.5469	60.0	107.0	45.0	14.00
R46714.0	—	14.00	0.5512	60.0	107.0	45.0	14.00
R46714.25	—	14.25	0.5610	65.0	115.0	48.0	16.00
R4679/16	9/16	14.29	0.5625	65.0	115.0	48.0	16.00
R46714.5	—	14.50	0.5709	65.0	115.0	48.0	16.00
R46737/64	37/64	14.68	0.5781	65.0	115.0	48.0	16.00
R46714.8	—	14.80	0.5827	65.0	115.0	48.0	16.00
R46715.0	—	15.00	0.5906	65.0	115.0	48.0	16.00
R46719/32	19/32	15.08	0.5938	65.0	115.0	48.0	16.00
R46715.1	—	15.10	0.5945	65.0	115.0	48.0	16.00
R46715.3	—	15.30	0.6024	65.0	115.0	48.0	16.00
R46739/64	39/64	15.48	0.6094	65.0	115.0	48.0	16.00
R46715.5	—	15.50	0.6102	65.0	115.0	48.0	16.00
R46715.8	—	15.80	0.6220	65.0	115.0	48.0	16.00
R4675/8	5/8	15.88	0.6250	65.0	115.0	48.0	16.00
R46716.0	—	16.00	0.6299	65.0	115.0	48.0	16.00



DRILLING FEED RATE CHART

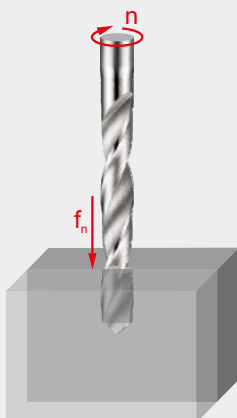

Feed per revolution (f_n in mm/rev)
Depending on the working conditions
it might be necessary to adjust these
values $\pm 25\%$.

How to use this table to find the feed per revolution (f_n):

1. Find your Alpha Code on the product page (example: 46J, "J" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per revolution (f_n).

		$\varnothing$ DC [mm]																		
		0.15	0.50	1.00	2.00	3.00	4.00	5.00	6.00	8.00	10.00	12.00	15.00	16.00	20.00	25.00	30.00	40.00	50.00	100.00
Feed rates	A	0.003	0.006	0.012	0.023	0.029	0.032	0.036	0.042	0.054	0.062	0.069	0.082	0.086	0.110	0.125	0.135	0.155	0.175	0.263
	B	0.004	0.007	0.014	0.028	0.037	0.041	0.046	0.053	0.067	0.080	0.090	0.103	0.108	0.135	0.153	0.165	0.188	0.208	0.312
	C	0.004	0.008	0.015	0.032	0.044	0.050	0.056	0.064	0.080	0.098	0.110	0.125	0.130	0.160	0.180	0.195	0.220	0.240	0.360
	D	0.004	0.008	0.016	0.038	0.053	0.060	0.068	0.078	0.098	0.119	0.130	0.149	0.155	0.188	0.210	0.228	0.253	0.275	0.413
	E	0.004	0.009	0.017	0.043	0.062	0.071	0.080	0.092	0.115	0.140	0.150	0.173	0.180	0.215	0.240	0.260	0.285	0.310	0.465
	F	0.005	0.009	0.018	0.050	0.073	0.084	0.095	0.109	0.138	0.165	0.178	0.202	0.210	0.248	0.275	0.295	0.320	0.343	0.515
	G	0.005	0.010	0.019	0.056	0.084	0.096	0.109	0.126	0.160	0.190	0.205	0.231	0.240	0.280	0.310	0.330	0.355	0.375	0.563
	H	0.005	0.010	0.020	0.066	0.102	0.116	0.130	0.150	0.190	0.228	0.243	0.271	0.280	0.320	0.355	0.375	0.398	0.418	0.627
	I	0.005	0.011	0.021	0.076	0.119	0.134	0.150	0.173	0.220	0.265	0.280	0.310	0.320	0.360	0.400	0.420	0.440	0.460	0.690
	J	0.006	0.012	0.024	0.084	0.135	0.152	0.170	0.197	0.250	0.298	0.315	0.349	0.360	0.405	0.445	0.465	0.485	0.503	0.755
	K	0.007	0.013	0.026	0.092	0.150	0.170	0.190	0.220	0.280	0.330	0.350	0.388	0.400	0.450	0.490	0.510	0.530	0.545	0.818
	L	0.007	0.014	0.028	0.101	0.165	0.186	0.208	0.240	0.305	0.360	0.385	0.419	0.430	0.485	0.525	0.545	0.568	0.588	0.882
	M	0.008	0.015	0.030	0.110	0.180	0.202	0.225	0.260	0.330	0.390	0.420	0.450	0.460	0.520	0.560	0.580	0.605	0.630	0.945
	N	0.008	0.016	0.032	0.119	0.195	0.218	0.242	0.280	0.355	0.420	0.455	0.481	0.490	0.555	0.595	0.615	0.642	0.672	1.008
	S	0.002	0.004	0.008	0.014	0.020	0.025	0.030	0.037	0.050	0.080	0.100	0.123	0.130	0.150	0.170	0.190	0.220	0.240	–
	T	0.004	0.008	0.015	0.028	0.040	0.050	0.060	0.070	0.090	0.110	0.130	0.160	0.170	0.190	0.210	0.230	0.260	0.275	–
	U	0.007	0.013	0.026	0.048	0.070	0.080	0.090	0.107	0.140	0.170	0.200	0.223	0.230	0.240	0.270	0.300	0.360	0.375	–
	V	0.010	0.019	0.038	0.069	0.100	0.115	0.130	0.153	0.200	0.250	0.280	0.310	0.320	0.340	0.400	0.440	0.510	0.530	–
	W	0.012	0.025	0.049	0.089	0.130	0.150	0.170	0.200	0.260	0.330	0.380	0.418	0.430	0.450	0.470	0.490	0.520	0.540	–
	X	0.014	0.028	0.056	0.103	0.150	0.180	0.210	0.250	0.330	0.420	0.480	0.533	0.550	0.580	–	–	–	–	–
	Y	0.017	0.034	0.068	0.124	0.180	0.220	0.260	0.317	0.430	0.550	0.700	0.700	0.700	0.740	–	–	–	–	–
	Z	0.024	0.047	0.094	0.172	0.250	0.325	0.400	0.533	0.800	1.000	1.100	1.175	1.200	1.200	–	–	–	–	–



WMG (WORK MATERIAL GROUP)

ISO group		WMG (Work Material Group)			Hardness (HB or HRC)	Ultimate Tensile Strength (MPa)	
P	P1	P1.1	Free machining steel (carbon steels with increased machinability)	Sulfurized	< 240 HB	≤ 830	
		P1.2		Sulfurized and phosphorized	< 180 HB	≤ 620	
		P1.3		Sulfurized/phosphorized and leaded	< 180 HB	≤ 620	
	P2	P2.1	Plain carbon steel (steels comprised of mainly iron and carbon)	Containing <0.25 % C	< 180 HB	≤ 620	
		P2.2		Containing <0.55 % C	< 240 HB	≤ 830	
		P2.3		Containing >0.55 % C	< 300 HB	≤ 1030	
	P3	P3.1	Alloy steel (carbon steels with an alloying content ≤ 10%)	Annealed	< 180 HB	≤ 620	
		P3.2		Hardened and tempered	180 – 260 HB	> 620 ≤ 900	
		P3.3			260 – 360 HB	> 900 ≤ 1240	
	P4	P4.1	Tool steel (special alloy steel for tools, dies and molds)	Annealed	< 26 HRC	≤ 900	
P4.2		Hardened and tempered		26 – 39 HRC	> 900 ≤ 1240		
P4.3				39 – 45 HRC	> 1240 ≤ 1450		
M	M1	M1.1	Ferritic stainless steel (straight chromium non-hardenable alloys)		< 160 HB	≤ 520	
		M1.2			160 – 220 HB	> 520 ≤ 700	
	M2	M2.1	Martensitic stainless steel (straight chromium hardenable alloys)	Annealed	< 200 HB	≤ 670	
		M2.2		Quenched and tempered	200 – 280 HB	> 670 ≤ 950	
	M3	M2.3	Austenitic stainless steel (chromium-nickel and chromium-nickel-manganese alloys)	Precipitation-hardened	280 – 380 HB	> 950 ≤ 1300	
		M3.1			< 200 HB	≤ 750	
		M3.2			200 – 260 HB	> 750 ≤ 870	
	M4	M3.3		260 – 300 HB	> 870 ≤ 1040		
		M4.1	Austenitic-ferritic (DUPLEX) or super-austenitic stainless steel		< 300 HB	≤ 990	
		M4.2	Precipitation hardening austenitic stainless steel		300 – 380 HB	≤ 1320	
K	K1	K1.1	Gray iron or Automotive Gray iron (GG) (iron-carbon castings with a lamellar graphite microstructure)	Ferritic or ferritic-pearlitic	< 180 HB	≤ 190	
		K1.2		Ferritic-pearlitic or pearlitic	180 – 240 HB	> 190 ≤ 310	
		K1.3		Pearlitic	240 – 280 HB	> 310 ≤ 390	
	K2	K2.1	Malleable iron (GTS/GTW) (iron-carbon castings with a graphite-free microstructure)	Ferritic	< 160 HB	≤ 400	
		K2.2		Ferritic or pearlitic	160 – 200 HB	> 400 ≤ 550	
		K2.3		Pearlitic	200 – 240 HB	> 550 ≤ 660	
	K3	K3.1	Ductile iron (GGG) (iron-carbon castings with a nodular graphite microstructure)	Ferritic	< 180 HB	≤ 560	
		K3.2		Ferritic or pearlitic	180 – 220 HB	> 560 ≤ 680	
		K3.3		Pearlitic	220 – 260 HB	> 680 ≤ 800	
	K4	K4.1	Austenitic gray iron (ASTM A436) (iron-carbon alloy castings with an austenitic lamellar graphite microstructure)		< 180 HB	≤ 190	
K4.2				< 240 HB	≤ 740		
K4.3				< 280 HB	> 840 ≤ 980		
K4.4				280 – 320 HB	> 980 ≤ 1130		
K4.5				320 – 360 HB	> 1130 ≤ 1280		
K5	K5.1	Compacted graphite iron CGI (ASTM A842) (iron-carbon castings with a vermicular graphite structure)	Ferritic	< 180 HB	≤ 400		
	K5.2		Ferritic-pearlitic	180 – 220 HB	> 400 ≤ 450		
	K5.3		Pearlitic	220 – 260 HB	> 450 ≤ 500		
N	N1	N1.1	Commercially pure wrought aluminium		< 60 HB	≤ 240	
		N1.2		Wrought aluminium alloys	Half hard tempered	60 – 100 HB	> 240 ≤ 400
		N1.3			Full hard tempered	100 – 150 HB	> 400 ≤ 590
	N2	N2.1	Cast aluminium alloys		< 75 HB	≤ 240	
		N2.2			75 – 90 HB	> 240 ≤ 270	
		N2.3			90 – 140 HB	> 270 ≤ 440	
	N3	N3.1	Free-cutting copper-alloys materials with excellent machining properties		–	–	
		N3.2		Short-chip copper-alloys with good to moderate machining properties		–	–
		N3.3		Electrolytic copper and long-chip copper-alloys with moderate to poor machining properties		–	–
	N4	N4.1	Thermoplastic polymers		–	–	
N4.2		Thermosetting polymers			–	–	
N4.3		Reinforced polymers or composites			–	–	
N5	N5.1	Graphite		–	–		
S	S1	S1.1	Titanium or titanium alloys		< 200 HB	≤ 660	
		S1.2			200 – 280 HB	> 660 ≤ 950	
		S1.3			280 – 360 HB	> 950 ≤ 1200	
	S2	S2.1	Fe-based high-temperature alloys		< 200 HB	≤ 690	
		S2.2			200 – 280 HB	> 690 ≤ 970	
	S3	S3.1	Ni-based high-temperature alloys		< 280 HB	≤ 940	
		S3.2			280 – 360 HB	> 940 ≤ 1200	
	S4	S4.1	Co-based high-temperature alloys		< 240 HB	≤ 800	
S4.2				240 – 320 HB	> 800 ≤ 1070		
H	H1	H1.1	Chilled cast iron		< 440 HB	–	
	H2	H2.1	Hardened cast iron		< 55 HRC	–	
		H2.2			> 55 HRC	–	
	H3	H3.1	Hardened steel <55 HRC		< 51 HRC	–	
		H3.2			51 – 55 HRC	–	
	H4	H4.1	Hardened steel >55 HRC		55 – 59 HRC	–	
H4.2				> 59 HRC	–		